

Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0520300429](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

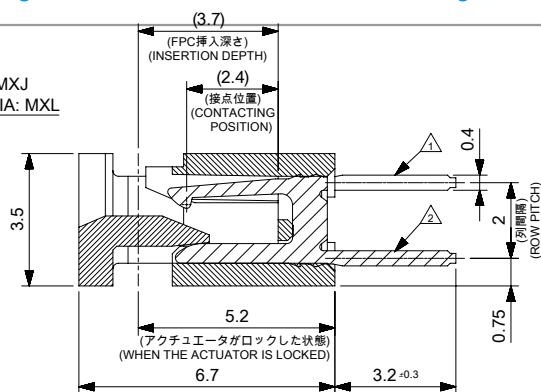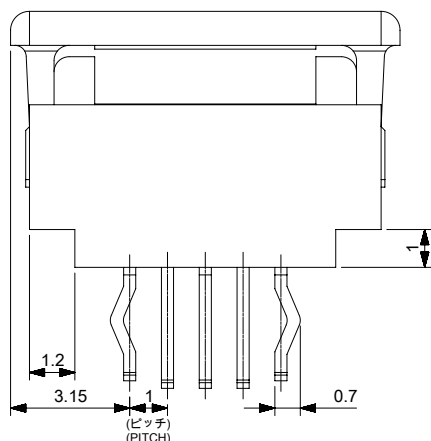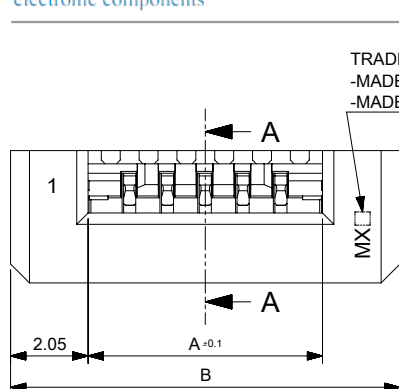

SECTION A-A

注記
 NOTES

△ CKT.NO.1を基準に偶数番目のソルダーテール。
EVEN NO. SOLDER TAIL.

△₂ CKT.NO.1を基準に奇数番目のソルダーテール。
ODD NO. SOLDER TAIL.

3 材料


MATERIAL

ターミナル:リン青銅、ニッケル下地、錫ビスマスめっき(t=0.32)
 TERMINAL:PHOSPHOR BRONZE, TIN-BISMUTH OVER NICKEL PLATING.
 ハウジング:66ナイロン、UL94V-0
 HOUSING:66NYLON, UL94V-0
 アクチュエータ:ポリエステル、UL94V-0
 ACTUATOR:POLYESTER, UL94V-0

4. 本製品は、52030-**10の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52030-**10.


35.3	31.2	52030-3029	30
34.3	30.2	52030-2929	29
33.3	29.2	52030-2829	28
32.3	28.2	52030-2729	27
31.3	27.2	52030-2629	26
30.3	26.2	52030-2529	25
29.3	25.2	52030-2429	24
28.3	24.2	52030-2329	23
27.3	23.2	52030-2229	22
26.3	22.2	52030-2129	21
25.3	21.2	52030-2029	20
24.3	20.2	52030-1929	19
23.3	19.2	52030-1829	18
22.3	18.2	52030-1729	17
21.3	17.2	52030-1629	16
20.3	16.2	52030-1529	15
19.3	15.2	52030-1429	14
18.3	14.2	52030-1329	13
17.3	13.2	52030-1229	12
16.3	12.2	52030-1129	11
15.3	11.2	52030-1029	10
14.3	10.2	52030-0929	9
13.3	9.2	52030-0829	8
12.3	8.2	52030-0729	7
11.3	7.2	52030-0629	6
10.3	6.2	52030-0529	5
9.3	5.2	52030-0429	4
8.3	4.2	52030-0329	3
B	A	オーダー番号 ORDER NO	極数 CK

[illegible]

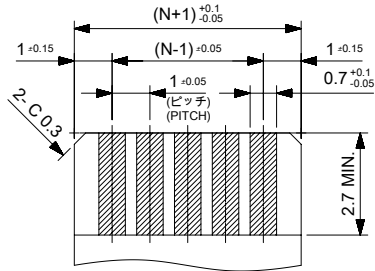

(仕上がり厚さ:0.3±0.05)
(THICKNESS:0.3±0.05)

適合FPC推奨寸法
APPLICABLE FPC RECOMMENDED DIM.



基板取付穴推奨寸法(t=1.6)
RECOMMENDED P.C.BOARD HOLE DIM.(t=1.6)
(マウント面)
(MOUNT SURFACE)

FPCについて:

打ち抜き方向は、導体側から補強板側を推奨致します。
補強フィルム材質は、ポリイミドを推奨致します。
接着剤は、熱硬化接着剤を推奨致します。

ABOUT FPC:

RECOMMENDED PUNCHER DIRECTION: FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.

RECOMMENDED MATERIAL:

STIFFENER FILM: POLYIMIDE

BONDING AGENT: THEROSETTING BONDING AGENT

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	= 0	EC NO. 102046 DRWN: JASANUMA CHKD: KTAKAHASHI APPR: YNOGAWA REV: A	2015/12/01	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 0.2 3 PLACES ± 0.2 2 PLACES ± 0.2 1 PLACE ± 0.25 0 PLACES ± 0.3 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS		SCALE						
	= 0		MM		1:1								
	= 0		DRAWN BY		DATE								
	= 0		JASANUMA		2015/12/01		1.0 FPC CONN ZIF (ST)						
	= 0		CHKD BY		DATE								
	= 0		KTAKAHASHI		2015/12/08		PRODUCT CUSTOMER DRAWING						
	= 0		APPR BY		DATE								
	= 0		YNOGAWA		2015/12/09					SERIES MATERIAL NUMBER CUSTOMER			
	= 0		DRAWING SIZE		THIRD ANGLE PROJECTION		52030	SEE CHART	GENERAL				
	= 0		A3				DOCUMENT NUMBER	520301000	DOC TYPE	PSD	DOC PART	000	SHEET NUMBER

RELEASE STATUS	P1	RELEASE DATE	09.12.2015	09.03.44
----------------	----	--------------	------------	----------

9

8

7

6

5

4

3

2

1