

Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0015311062](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

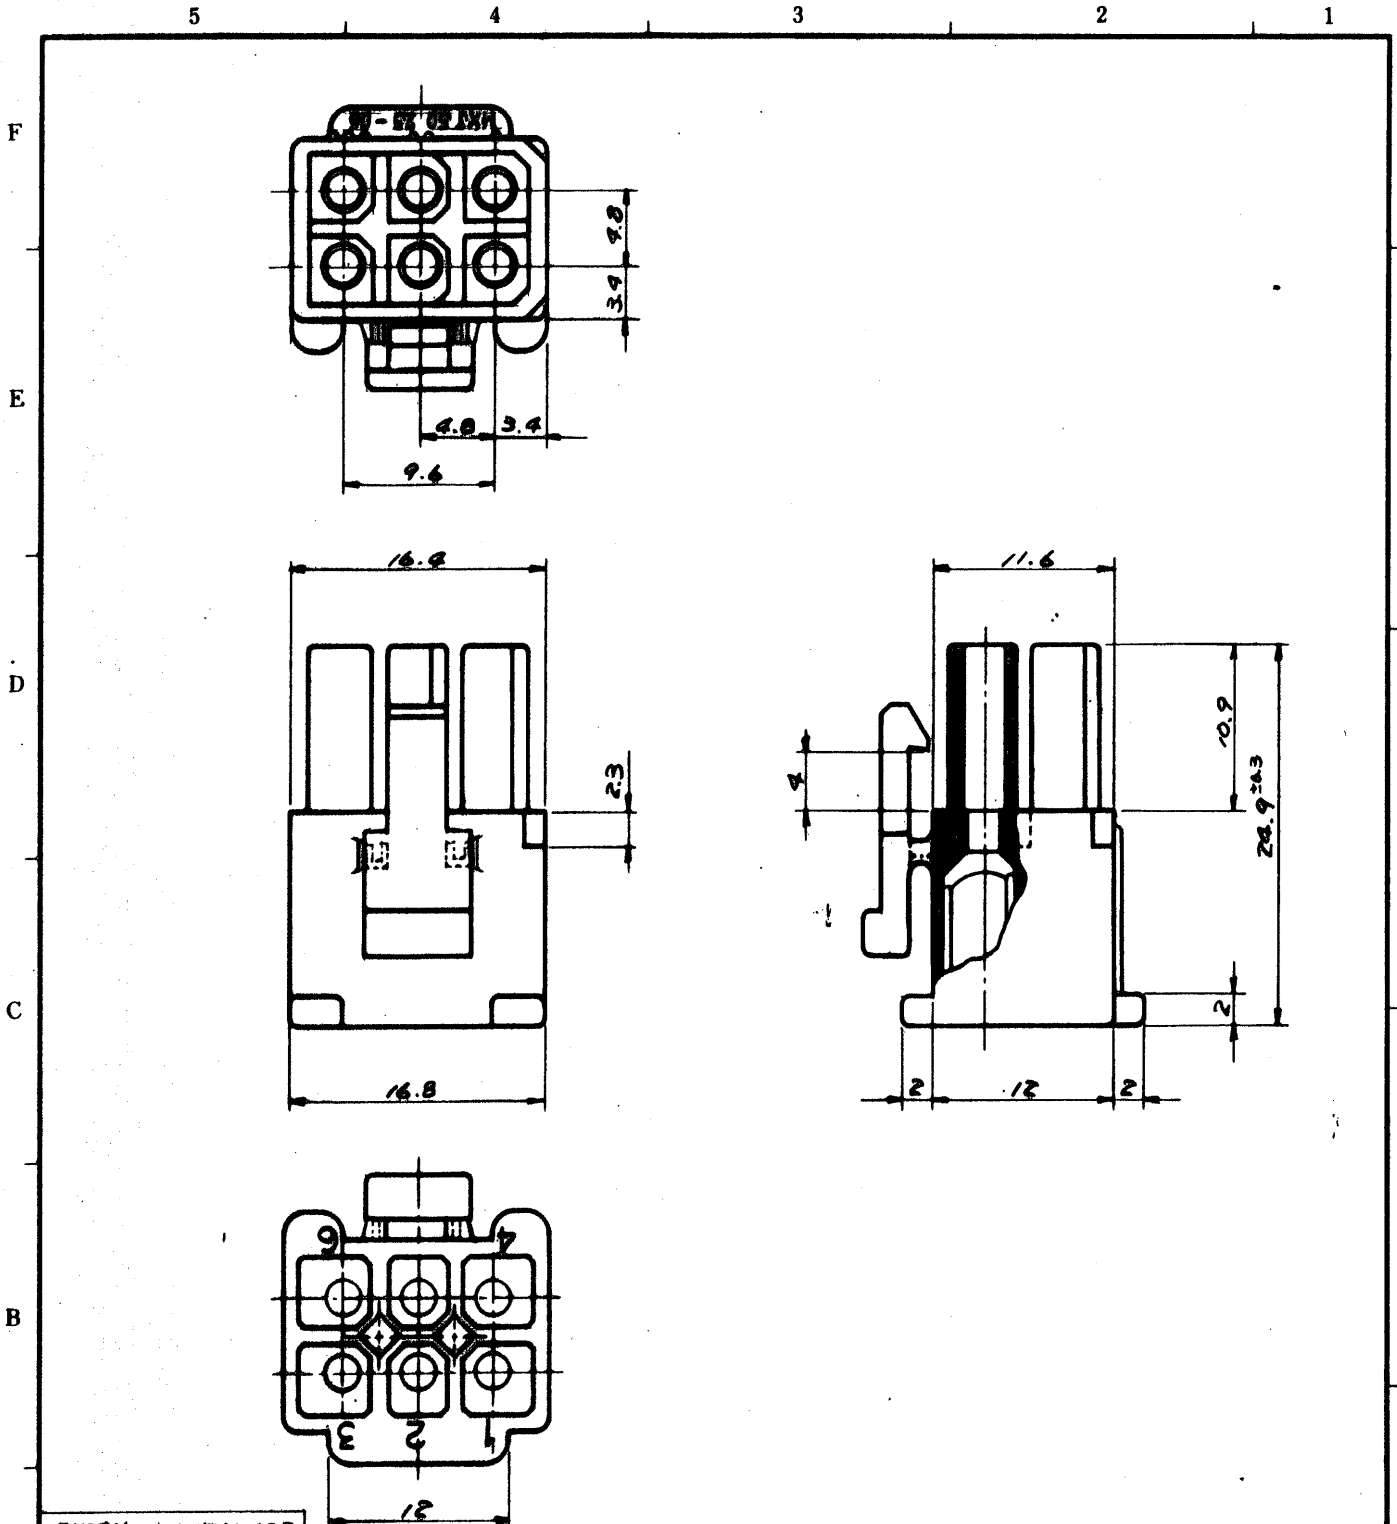

GENERAL TOLERANCES	
10 UNDER	±0.2
20 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±3°

				公差 (Tolerances) .000 → ±0.005 .00 → ±0.05 .0 → ±0.1 . → ±0.3	所要数 (Req)	DRWG. <i>J. Avano '97 '77</i> DSN'D <i>MENDOTO '97 '77</i> CHK'D <i>K. S. Shin</i> APP'D
				材料 (MAT'L) NYLON66, 99V-2	MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	No. SD-5025-06R1 REV. D
D	Qty: 1000	ECN NO. 1486	7/21/97	熱処理 (H.T.) HRc		
C	REMOVED 'X'	ECN NO. 740	7/21/97	仕上げ (Finish)		
B ₁	ロッキン7-VT		7/19/98	Scale		
B	リブ: 7-キットNO.		7/19/97	名称 (Name)		
A	REVISED		7/17/97			
O	PROPOSED					

MINI. FIT CONN.

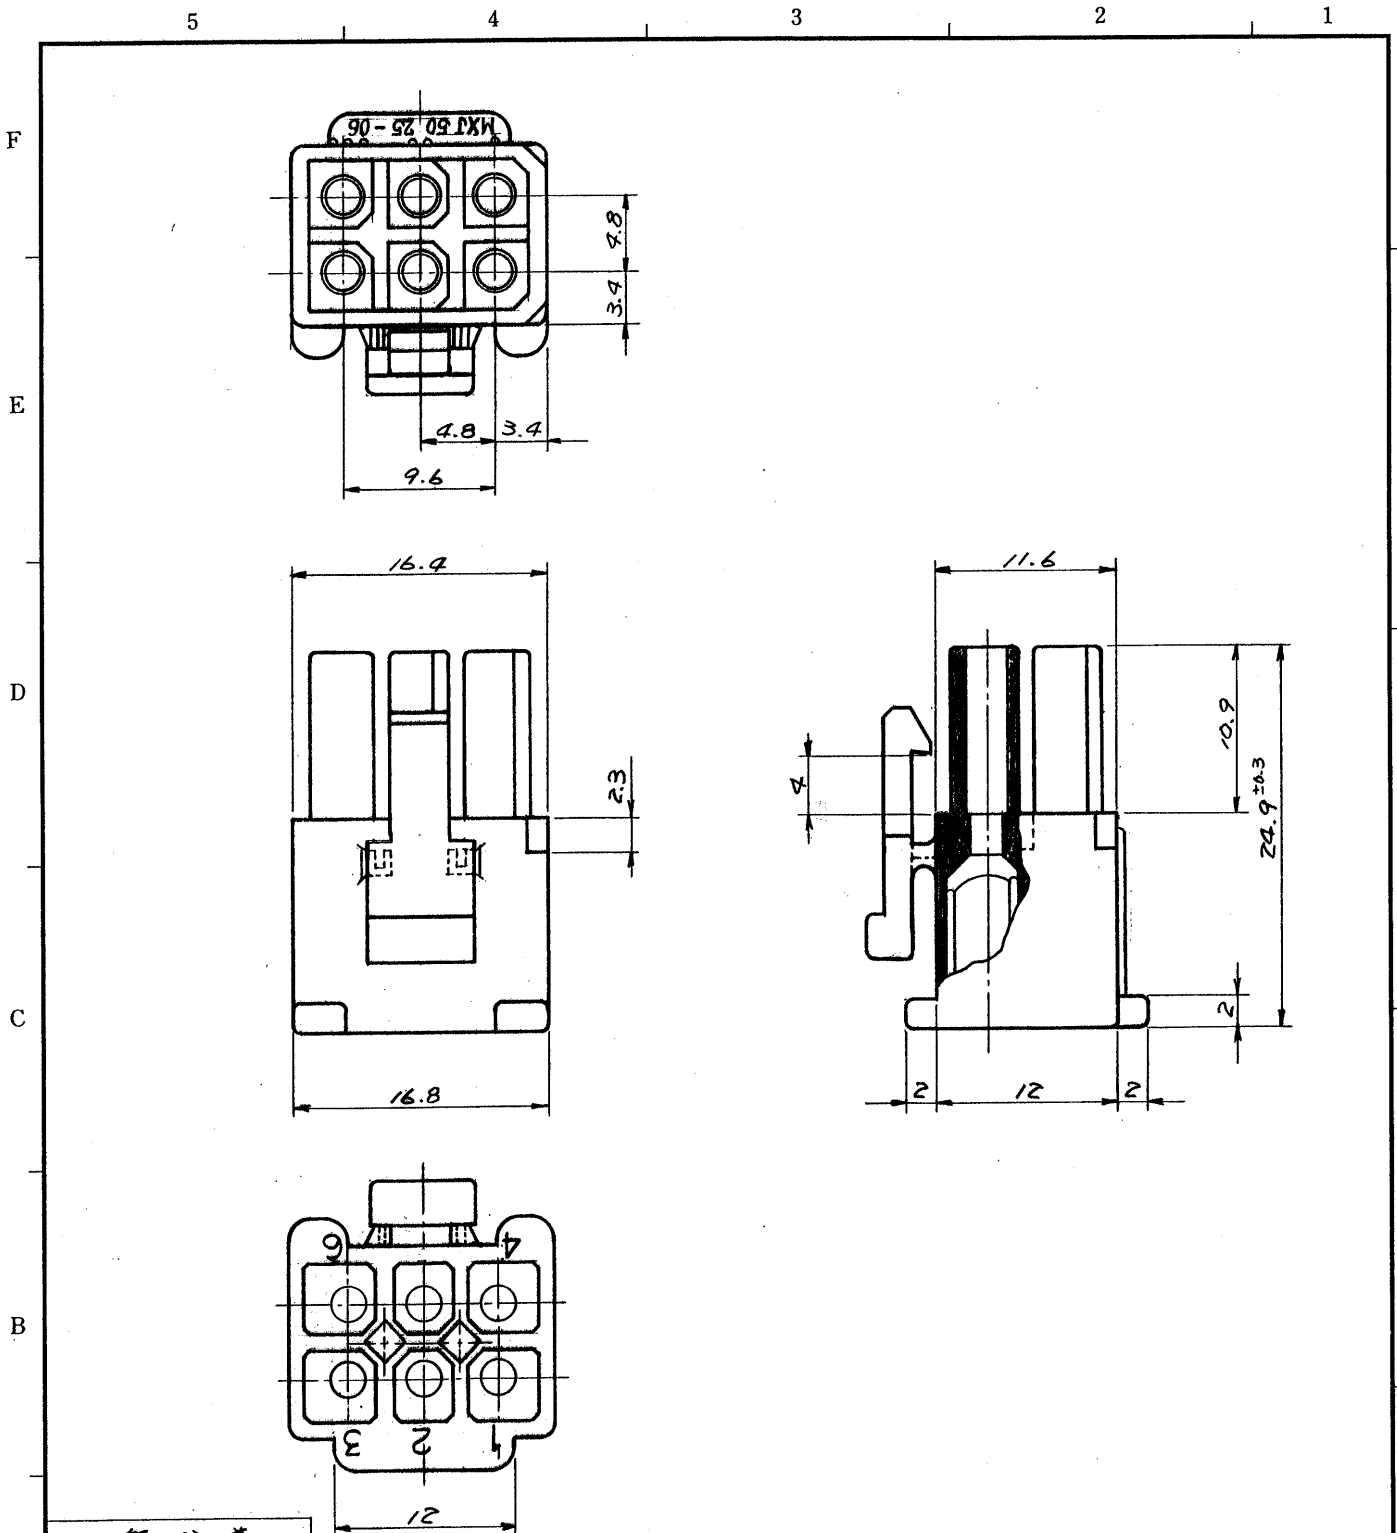

一般公差	
10 未満	±0.2
10以上30未満	±0.25
30 以上	±0.3
角度	±3°

			公差 (Tolerances) .000 → ±0.005 .00 → ±0.05 .0 → ±0.1 . → ±0.3	所要数 (Req)	DRWG. <i>Y. Awano</i> '9/17 '77 DSN'D <i>M. ENOMOTO</i> '9/17 CHK'D <i>K. Shimizu</i> APP'D <i>W. W.</i>
			材料 (MAT'L) NYLON66, 94V-2	MOLEX-JAPAN CO., LTD. 日本モレックス株式会社	
			熱処理 (H.T.) HRc — # —		
D	ロッキング変柱 ECN. NO. 1486	1/21/79	K.H.	仕上げ (Finish)	No. SD-5025-06R1
C	REMOVED "X" ECN NO. 748	3/18/78	<i>Y. W.</i>		REV. <i>D</i>
B ₁	ロッキングレバー	2/13/78	<i>W. W.</i>		
B	リブ. サークットNO.	12/15/77	<i>W. W.</i>		
A	REVISED	11/15/77	<i>W. W.</i>		
O	PROPOSED	9/7 '77	<i>W. W.</i>		
			Scale	名称 (Name)	MINI. FIT CONN.