

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Molex Connector Corporation](#)
[0530470610](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DWG. NO.
SD-53047-**-10

E




D

C

B

A

DIMENSIONS IN METRIC DO NOT SCALE DRAWING

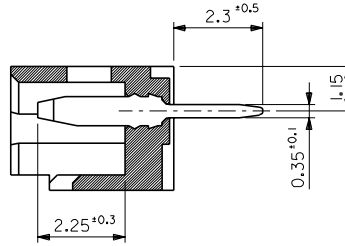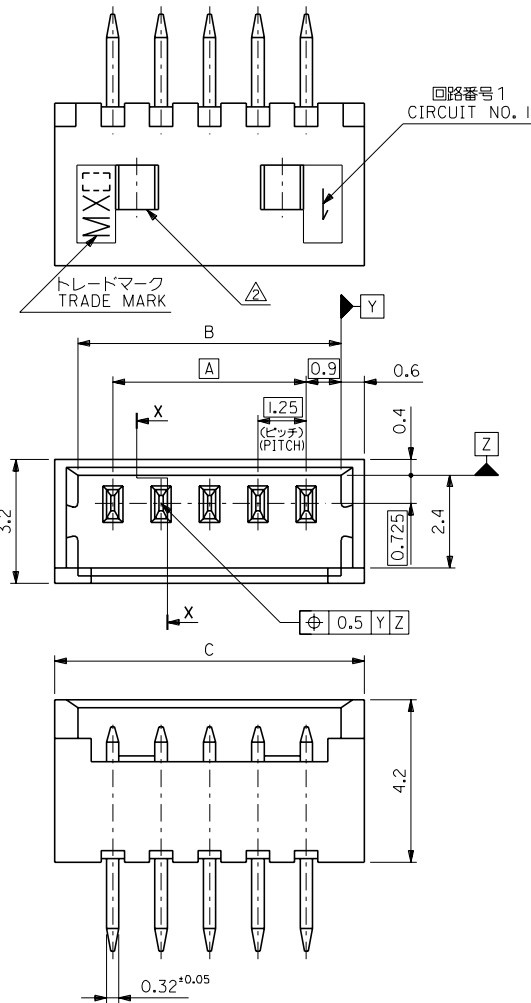

SECT. X-X

注記
NOTES

- 嵌合相手 : 51021 シリーズ
MATES WITH : 51021 SERIES
- ロック窓は2極と3極は1カ所、4極以上は2カ所とする。
LOCK WINDOW :
ONE PLACE FOR 2 AND 3 CKTS.
TWO PLACES FOR 4 AND MORE THAN 4 CKTS.
- 材料
ワエハー : 66ナイロン、UL94V-0 (カラー : オフホワイト)
ピン : リン青銅、錫メッキ (0.9 μm MIN.)
MATERIAL
WAHER : 66NYLON, UL94V-0 (COLOR : OFF-WHITE)
PIN : PHOSPHOR BRONZE, PRE-TINNED (0.9 μm MIN.)

20.5	19.3	17.5	53047-1510	15
19.25	18.05	16.25	-1410	14
18	16.8	15	-1310	13
16.75	15.55	13.75	-1210	12
15.5	14.3	12.5	-1110	11
14.25	13.05	11.25	-1010	10
13	11.8	10	-0910	9
11.75	10.55	8.75	-0810	8
10.5	9.3	7.5	-0710	7
9.25	8.05	6.25	-0610	6
8	6.8	5	-0510	5
6.75	5.55	3.75	-0410	4
5.5	4.3	2.5	-0310	3
4.25	3.05	1.25	53047-0210	2
C	B	A	ENG. NO.	極数 NO. OF CKTS.

角度 ANGLE	±3°	材料 MATERIAL	注記3 参照 SEE NOTE 3	モレックス株式会社 MOLEX-JAPAN CO., LTD.
30°以上 OVER	±0.3	仕上げ FINISH	—	REVISE ONLY ON CAD SYSTEM
10°以上 30°未満 OVER UNDER	±0.25	適用電線範囲 WIRE RANGE	—	TITLE 名称
10°未満 UNDER	±0.2	被覆外径 INS. RANGE	—	1.25 WIRE TO BOARD CONN. WAHER ASS'Y STRAIGHT
一般公差 GENERAL TOLERANCES	記号 L/T/R	変更内容 REVISION RECORD	DATE DATE	DWG. NO. SD-53047-**-10
				REV E

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX (JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス（株）の所有する情報を含むもので 当社の許可なく複製を禁止する。
EN-01C(032)MXJ-32