

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[MS3126E14-15S](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

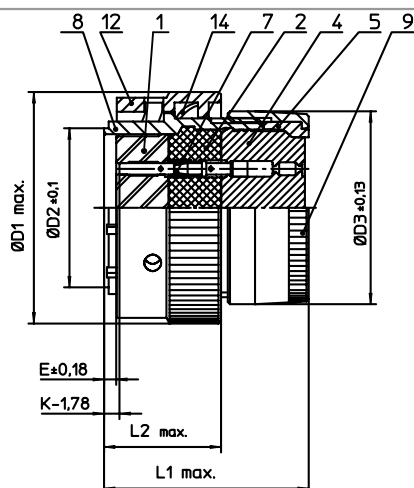

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| D1  | 30.1              |
| D2  | 18.2              |
| D3  | 23.5              |
| E   | 0.23              |
| K   | 3.89              |
| L1  | 34                |
| L2  | 15.9              |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 1   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 2   | ISOLIERKÖRPER MITTE / WAVER             |
| 4   | DICHTKÖRPER / GROMMET                   |
| 5   | ENDRING / ENDRING                       |
| 7   | KONTAKT BUCHSE / CONTACT SOCKET         |
| 8   | GEHÄUSE / RECEPTACLE                    |
| 9   | ENDGEHÄUSE / ENDBELL                    |
| 12  | ÜBERWURFMUTTER / COUPLING NUT           |
| 14  | WELLFEDER / WASHER                      |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

**Material Specification:**

|                     |                                          |
|---------------------|------------------------------------------|
| Shell Material:     | Aluminium alloy                          |
| Shell Plating:      | Olive drab chromate over cadmium plating |
| Insulator Material: | Polychloroprene                          |
| Contact Material:   | Copper alloy, gold plated                |
| Contact Plating:    | Copper alloy, gold plated                |

all dimensions are in mm

Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for

CUSTOMER



**ITT**

Engineered for life  
ITT CANNON GmbH  
D-71534 Wernsdorf, Germany

description MS3126E1415S

Straight plug

Grommet seal

Crimp Contacts / Socket / Layout: 14-15

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page  
1/1

revision

1012 5, Jul 16