
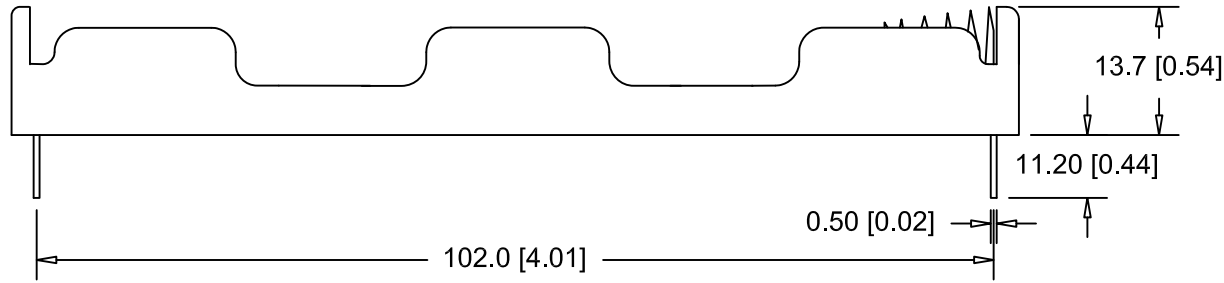



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/24/07	B	DIM. 107.8 WAS 107.9 DIM. 9.5 WAS 8.89 DIM. 50.2 WAS 49.5	T.B.	B.S.	
12/21/12	C	DIM. 16.00 WAS 16.20 DIM. 104.0 WAS 102.0 DIM. 11.20 WAS 11.18	T.B.	B.S.	
02/22/13	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
10/30/15	E	DIM. 102.0 WAS 104.0 DIM. 16.2 WAS 16.0	T.B.	B.S.	

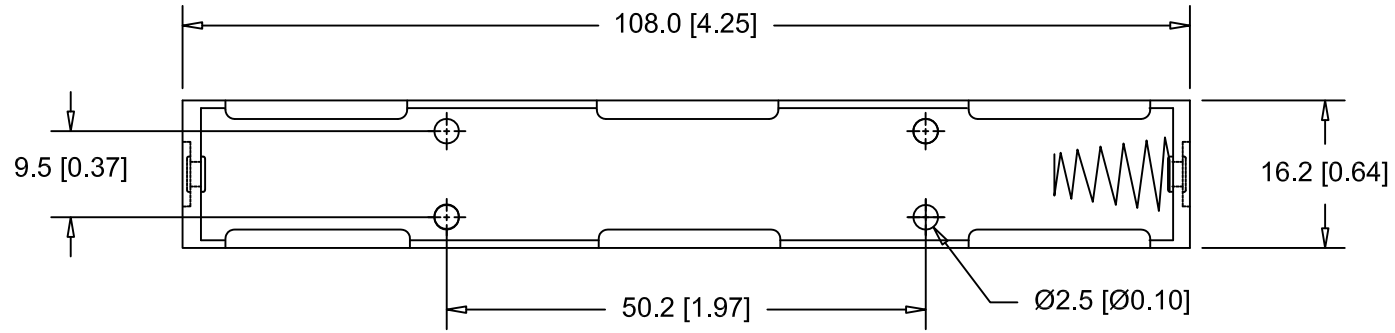

**SPECIFICATIONS:**

Plastic material - polypropylene, PP-1040  
 Flammability rating-UL94 HB, UL file no. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - nickel plated steel spring  
 Rivets - Brass, nickel plated  
 P.C. Pins - Brass, nickel plated  
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title TWO "AA" CELL HOLDER WITH PC PINS	Date 10/30/15	
Fractional ± .8 (.030)		Drawing Number BC12AAPC	
Angular ± 3°			