


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/28/13	A	RE-DRAWN IN AUTOCAD UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

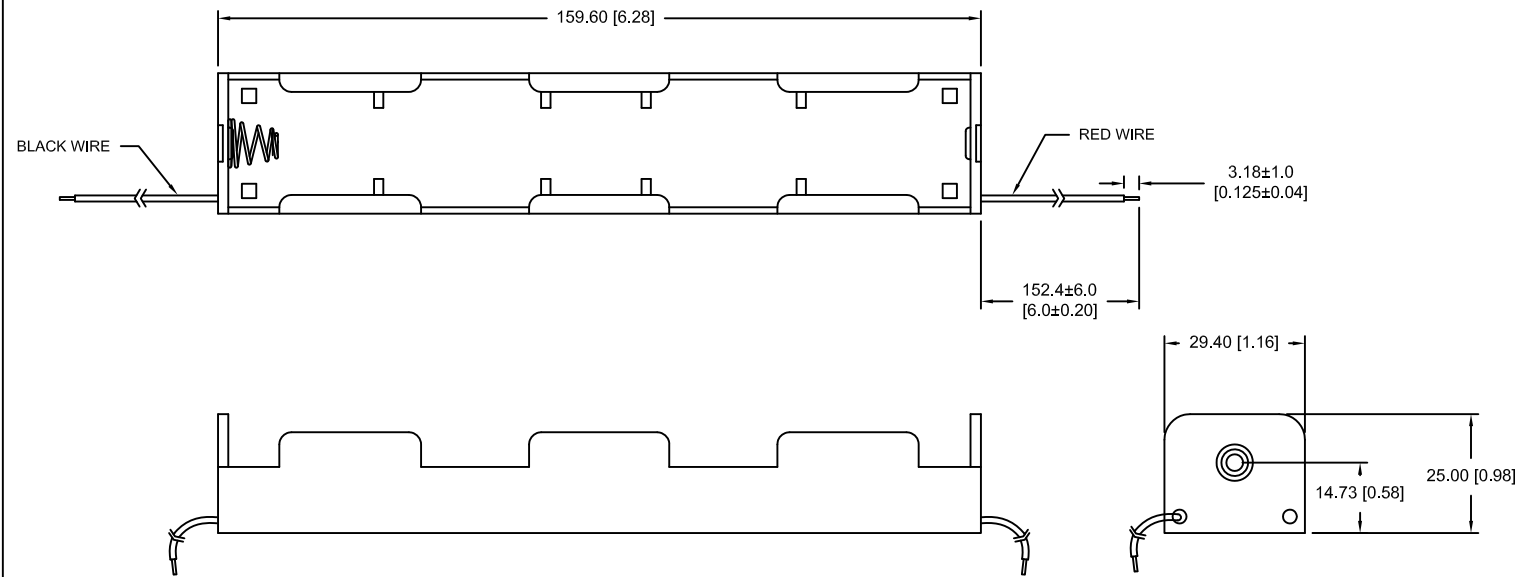

SPECIFICATIONS

Plastic material - Polypropylene  
Flammability Rating -UL94-HB, UL File NO. E216959  
Temperature Range: -10°C to +100°C  
Springs - Nickel Plated Spring Steel  
Wire: 26AWG, UL1007, CSA  
Rivets - Brass, Nickel Plated  
9Volt Snaps - Brass, Nickel Plated  
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
ROHS 2 COMPLIANT

Tolerance (Except as noted)	<div> <div> <div></div> <div>MPD</div> </div> <div> <div>Memory Protection Devices, Inc</div> <div>200 Broad Hollow Road, Farmingdale, New York 11735</div> </div> </div>		
decimal ±.5 (.020)		Scale XX	<div>Drawn By T.S.</div> <div>Approved By T.B.</div>
Fractional ± .8 (.030)		<div>Title</div> <div>THREE "C" CELL HOLDER WITH WIRE LEADS</div>	
Angular ± 3°	Date 6/28/13	<div>Drawing Number</div> <div>BH13CW</div>	