


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/22/06	A	Added "ROHS COMPLIANT"	T.B.	B.S.	
3/07/08	B	DIM. 2.550 WAS 2.567 DIM. 1.105 WAS 1.075.	T.B.	B.S.	
8/28/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

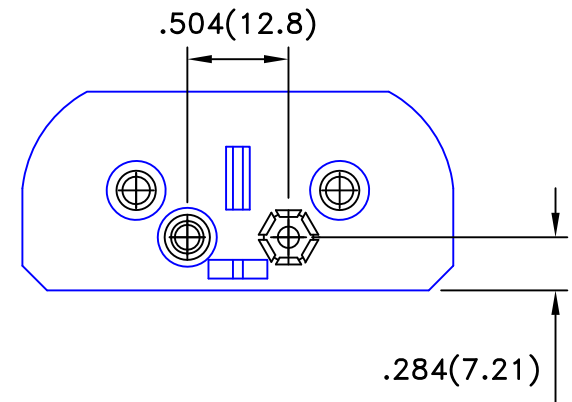

SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE, PP-1040
FLAMMABILITY RATING -UL94-HB, UL FILE NO.
E216959

TEMPERATURE RANGE: -10°C to +100°C

RIVETS: BRASS, NICKEL PLATED.

SPRING: SPRING STEEL, NICKEL PLATED.


WIRE: 26AWG, UL1007, CSA, TR64

9VOLT SNAPS: BRASS, NICKEL PLATED

CONTACT RESISTANCE: UNDER 50m Ω FOR +/-

CONTACTS PER EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale 1=1	Drawn By T.S.
Fractional $\pm .8$ (.030)		Approved By T.B.	
Angular $\pm 3^\circ$	Title FOUR "C" CELL HOLDER WITH SNAP FASTENERS		
	Date 8/28/14	Drawing Number BH24CSF	