

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Würth Electronics Midcom](#)
[750311856](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



Midcom

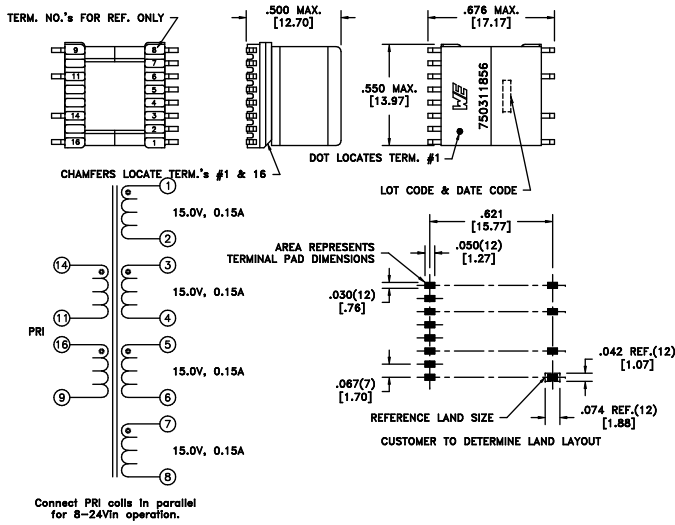

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	16-9 tie(14+16, 9+11), @20°C	0.040 ohms ±10%
D.C. RESISTANCE	3-4 @20°C	1.600 ohms ±10%
D.C. RESISTANCE	5-6 @20°C	1.600 ohms ±10%
D.C. RESISTANCE	1-2 @20°C	1.800 ohms ±10%
D.C. RESISTANCE	7-8 @20°C	1.800 ohms ±10%
INDUCTANCE	16-9 tie(14+16, 9+11), 100kHz, 100mVAC, L _s	3.80uH ±5%
SATURATION CURRENT	20% rolloff from initial	>12A
LEAKAGE INDUCTANCE	16-9 tie(14+16, 9+11, 1 thru 8), 100kHz, 50mVAC, L _s	250nH typ., 400nH max.
DIELECTRIC	1-16 1500VAC, 1 second	-
DIELECTRIC	1-3 tie(3+5+7), 1000VAC, 1 second	-
DIELECTRIC	3-5 tie(5+7), 1000VAC, 1 second	-
DIELECTRIC	5-7 1000VAC, 1 second	-
URNS RATIO	(1-2):(16-9)	4:1, ±1%
URNS RATIO	(3-4):(16-9)	4:1, ±1%
URNS RATIO	(5-6):(16-9)	4:1, ±1%
URNS RATIO	(7-8):(16-9)	4:1, ±1%
URNS RATIO	(14-11):(16-9)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0325 www.we-online.com/midcom	CONVERSION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13] This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	DRAWING TITLE TRANSFORMER	PART NO. 750311856
6A	11/10	SEE REVISION SHEET FOR REVISION LEVEL			eISos p/n: 750311856	compliant RoHS SPECIFICATION SHEET 1 OF 1