

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Riedon](#)

[PF1262-0R01J1](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## PF1262 Series

TO-126 Power Thin Film Resistors



- TO-126 Housing
- Resistances from 0.01 to 51K Ohms
- Rated Power to 20 Watts
- Resistance Tolerances to  $\pm 1\%$
- TCR to  $\pm 50\text{ppm}/^\circ\text{C}$
- Low Inductance (  $< 50\text{nH}$  )
- Isolated Back Plate

### SPECIFICATIONS

Type	Power Rating		Thermal Resistance	Resistance Range <sup>3</sup>		Tolerances	Temperature Coefficients
	Heatsink <sup>1</sup>	Free Air <sup>2</sup>		Min	Max		
<b>PF1262</b>	20W	1W	5.9K/W	0.01 $\Omega$	51K $\Omega$	$\pm 1\%$ ( $R \geq 0.1\Omega$ ) $\pm 5\%$	$\pm 50\text{ppm}/^\circ\text{C}$ ( $R \geq 10\Omega$ ) $\pm 100\text{ppm}/^\circ\text{C}$ ( $0.1\Omega \leq R < 10\Omega$ ) $\pm 250\text{ppm}/^\circ\text{C}$ ( $R < 0.1\Omega$ )

<sup>1</sup> Power rating based on 25°C Flange Temperature

<sup>2</sup> Power rating based on 25°C Ambient Temperature

<sup>3</sup> Consult Factory for Higher or Lower Values

Specification	Value	
Maximum Current	25A	
Temperature Range	-55°C to +155°C : PF1262	
Dielectric Strength	2000 VAC	
Max. Operating Voltage	500 V	
Insulation Resistance	>1000 Meg-Ohm	
Environmental Performance	$\Delta R$	Test Conditions
Load Life	$\pm 1\% + 0.05\Omega$	25°C / 90 min ON / 30 min OFF / 1000 hr
Humidity Resistance	$\pm 1\% + 0.05\Omega$	40°C / 90-95% RH / DC 0.1W / 1000 hr
Temperature Cycle	$\pm 0.25\% + 0.05\Omega$	-55°C for 30 min / +155°C for 30 min / 1000 hr
Solder Heat	$\pm 0.1\% + 0.05\Omega$	+350°C / 3s
Vibration	$\pm 0.25\% + 0.05\Omega$	IEC60068-2-6

### Ordering Information


Part Description: Part Type - Resistance - Tolerance  
 Example: PF1262 0.5 Ohm 1%



# PF1262 Series

TO-126 Power Thin Film Resistors

## SPECIFICATIONS (continued)

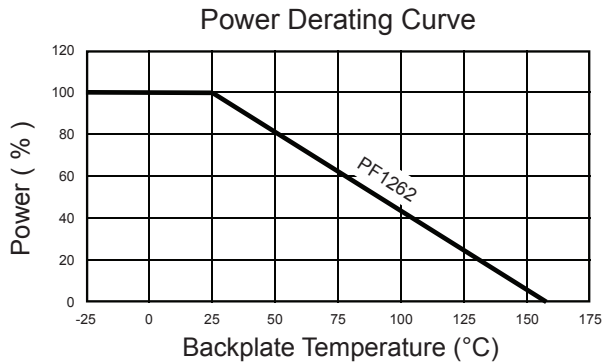


### Power Rating Notes -

The PF1260 Series Thin Film Resistors must be attached to a suitable heatsink. The maximum internal resistor temperature is 155°C.

To specify an appropriate heatsink use the following formula :

$$R_{\theta H} = \frac{T_{MAX} - (P \times R_{\theta R}) - T_A}{P}$$

Where:  $R_{\theta H}$  = Thermal Resistance of Heatsink ( K/W )  
 $R_{\theta R}$  = Thermal Resistance of Resistor ( K/W )  
 $T_{MAX}$  = Maximum Temperature of Resistor  
 $T_A$  = Ambient Temperature of Heatsink ( °C )  
 $P$  = Power Through Resistor ( W )

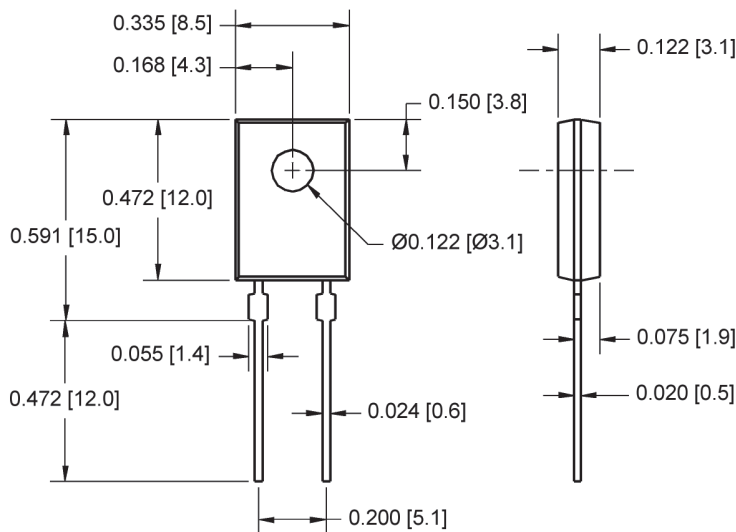

### Mounting Notes -

The PF1260 Series Thin Film Resistors must be attached to a suitable heatsink. Mount resistor using thermal grease to a clean / flat surface. Use a compression washer to provide 150 to 300 pounds ( 665 to 1330N ) of mounting force. Torque mounting screw to 8 in-lbs ( 0.9 Nm ).

Back plate is isolated from both pins.