

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[MS3108R20-19S](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

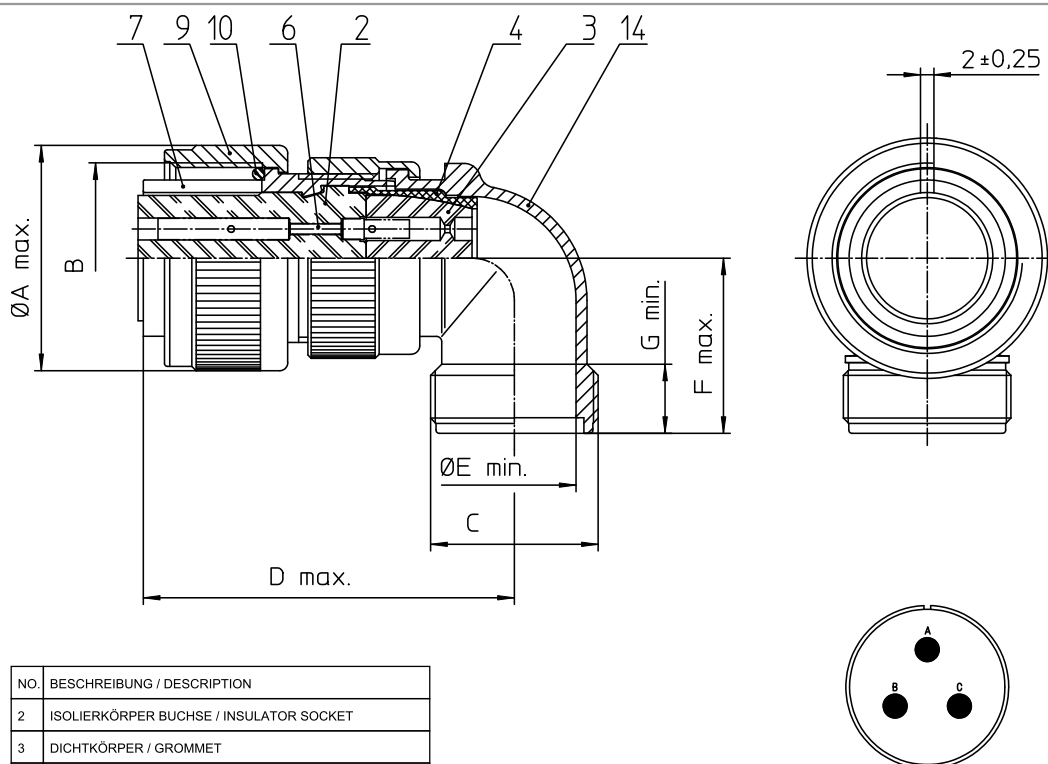

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 37.4              |
| B   | 1 1/4-18NEF-2B    |
| C   | 1 3/16-18NEF-2A   |
| D   | 37.5              |
| E   | 22.0              |
| F   | 29.5              |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 12  | ENDGEHÄUSE / ENDBELL                    |

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |
| Material Specification:                                                                            |
| Shell Material: Aluminium alloy                                                                    |
| Shell Plating: Olive drab chromate coating over cadmium plating                                    |
| Insulator Material: Neoprene                                                                       |
| Contact Material: Copper alloy                                                                     |
| Contact Plating: Hard silver                                                                       |

|                                                                                                                                                                                                        |                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                      | drawing for<br>CUSTOMER                                                                                                             |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GERMANY<br/>D-71084 Wernstetten/Germany</small> | description: MS3108R20-19S<br>Plug 90°<br>Shortened light-weight endbell without cable clamp<br>Solder Cup / Socket / Layout: 20-19 |
| <small>© All rights reserved. Reproduction or issue to third in any form without prior written authorization of ITT Cannon</small>                                                                     | <small>page 1/1</small> <small>revision 377.3 Jul 16</small>                                                                        |