

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1518025](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

SAC-2P-MSB/ 2,0-910 SCO

Order No.: 1518025



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1518025>

Bus system cable, 2-position, PUR, halogen-free, Violet, RAL 4001, shielded, Plug, straight M12-SPEEDCON, B-coded, on Free conductor end, Cable length: 2 m



Commercial data

GTIN (EAN)	4017918968144
sales group	D117
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	0.1593 KG
Catalog page information	Page 272 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
07/12/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	2

SAC-2P-MSB/ 2,0-910 SCO Order No.: 1518025

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1518025>

Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Length of cable	2 m
Stripping length of the free conductor end	50 mm
Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)

General characteristics

Coding	B - inverse
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Status display	No

Conductor data

Cable type	PROFIBUS
Cable type (abbreviation)	910
Conductor cross section	0.25 mm ²
AWG signal line	24
Conductor structure signal line	19x 0.13 mm
Core diameter including insulation	2.55 mm $\pm$ 0.07 mm
External cable diameter	7.80 mm
Wire colors	Red, green
External sheath, color	Violet, RAL 4001
Insulation resistance	$\geq 5 \text{ G}\Omega \cdot \text{km}$
Conductor resistance	$\leq 78.4 \text{ }\Omega/\text{km}$
Working capacitance	32 pF (core-core)
Wave impedance	Nom. 150 Ω $\pm$ 10 %
Nominal voltage, conductor	30 V
Test voltage Core/Core	1500 V
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	2 cores with 2 fillers to the core


SAC-2P-MSB/ 2,0-910 SCO Order No.: 1518025

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1518025>

Shielding	Tinned copper braided shield
Optical shield covering	80 %
Outer sheath, material	PUR
Material conductor insulation	Foamed PE
Conductor material	Tin-plated Cu litz wires
Smallest bending radius, fixed installation	min. 78 mm
Smallest bending radius, movable installation	min. 78 mm
Number of bending cycles	5000000
Bending radius	78 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	7 m/s ²
Ambient temperature (operation)	-20 °C ... 80 °C (cable, fixed installation)
	-20 °C ... 80 °C (cable, flexible installation)
Flame resistance	IEC 60332-1
	DIN EN 50265-2-1


Diagrams/Drawings

Dimensioned drawing

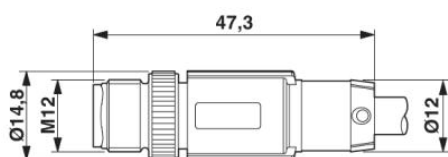

M12 x 1 male connector, straight, shielded

Circuit diagram

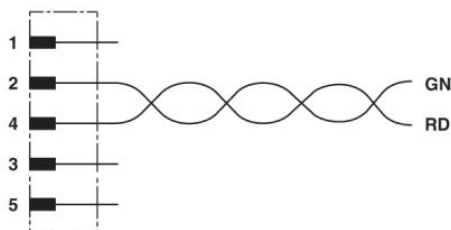


Contact assignment of the M12 plug

SAC-2P-MSB/ 2,0-910 SCO Order No.: 1518025

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1518025>

Schematic diagram

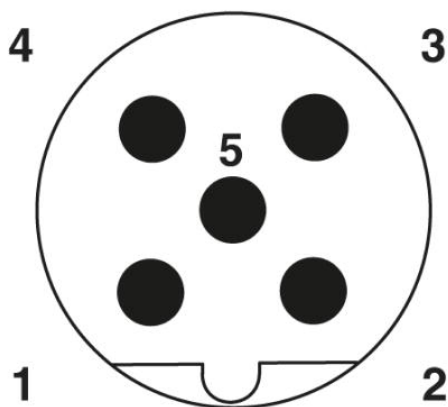

Pin assignment M12 male connector, 5-pos., B-coded, male side

SAC-2P-MSB/ 2,0-910 SCO Order No.: 1518025

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1518025>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;