

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1507117](#)


For any questions, you can email us directly:
sales@integrated-circuit.com



Extract from the online catalog

SAC-5P- 2,0-900/M12FSB

Order No.: 1507117

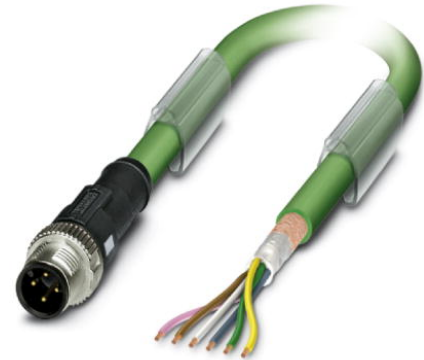

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507117>

Bus system cable, INTERBUS, 5-position, PUR, halogen-free, Green RAL 6017, shielded, Free conductor end, on Socket, straight M12, B-coded, Cable length: 2 m



| Commercial data | |
|--------------------------|--------------------|
| GTIN (EAN) | 4017918899974 |
| sales group | D117 |
| Pack | 1 pcs. |
| Customs tariff | 85444290 |
| Weight/Piece | 0.1621 KG |
| Catalog page information | Page 266 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
10/25/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|-----------------------|--------|
| Rated current at 40°C | 4 A |
| Rated voltage | 60 V |
| Number of positions | 5 |
| Volume resistance | ≤ 5 mΩ |

SAC-5P- 2,0-900/M12FSB Order No.: 1507117
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507117>

| | |
|--|--|
| Insulation resistance | ≥ 100 MΩ |
| Length of cable | 2 m |
| Stripping length of the free conductor end | 50 mm |
| Ambient temperature (operation) | -25 °C ... 90 °C (Male connector / female connector) |

General characteristics

| | |
|-----------------------------|---|
| Coding | B - inverse |
| Surge voltage category | II |
| Pollution degree | 3 |
| Degree of protection | IP65/IP67/IP69K |
| Insertion/withdrawal cycles | ≥ 100 |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 66 |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, (nickel-plated) |
| Sealing material | NBR |
| Status display | No |

Conductor data

| | |
|---------------------------------|--------------------------------------|
| Cable type | INTERBUS |
| Cable type (abbreviation) | 900 |
| Conductor cross section | 0.25 mm ² |
| AWG signal line | 24 |
| Conductor structure signal line | 32 x 0.10 mm |
| External cable diameter | 8.00 mm |
| Wire colors | Green-yellow, white-brown, gray-pink |
| External sheath, color | Green RAL 6017 |
| Insulation resistance | > 5 GΩ*km |
| Conductor resistance | ≤ 159.8 mΩ/m |
| Working capacitance | 60 nF (At 800 Hz) |
| Signal speed | 0.66 c |
| Nominal voltage, conductor | 250 V |
| Test voltage Core/Core | 1500 V |
| Test voltage Core/Shield | 1000 V |
| Twisted pairs | 2 cores to the pair |

SAC-5P- 2,0-900/M12FSB Order No.: 1507117
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507117>

| | |
|---|----------------------|
| Shielding | Braided copper wires |
| Outer sheath, material | PUR |
| Conductor material | Bare Cu litz wires |
| Smallest bending radius, fixed installation | 60 mm |
| Smallest bending radius, movable installation | 120 mm |


Certificates / Approvals



Certification GOST


Diagrams/Drawings

Dimensioned drawing

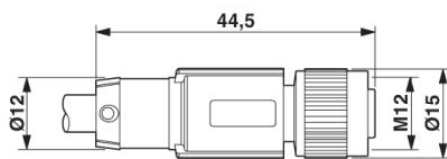

M12 x 1 female connector, straight, shielded

Circuit diagram

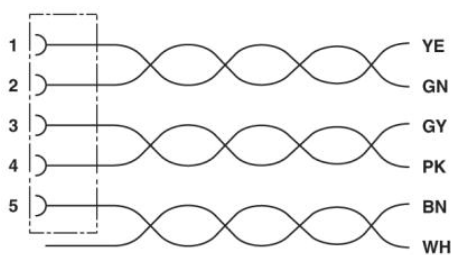


Contact assignment of the M12 socket

SAC-5P- 2,0-900/M12FSB Order No.: 1507117

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507117>

Schematic diagram

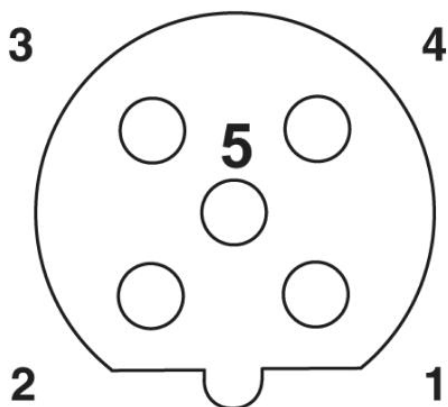

Pin assignment M12 socket, 5-pos., B-coded, view socket side

SAC-5P- 2,0-900/M12FSB Order No.: 1507117

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507117>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;