

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Crouzet USA](#)  
[80149605](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



**30 and 40 W - 50 Nm - Planetary Ø 62 mm 801496 SNI10 Part number Contact us**



**With or without integrated control electronics**

- Output in motor shaft
- Ideal for high reduction ratios
- Ideal for high-torque applications
- Excellent efficiency
- Reversible movement

**Part numbers**

|          | Type         | With built-in electronic control | Without built-in control, with Hall effect sensors | Number of stages | Ratios (i) | Output speed (rpm) 24 V DC | Available torque (Nm) |
|----------|--------------|----------------------------------|--|------------------|------------|----------------------------|-----------------------|
| 80149605 | 801496 SNI10 | SNI10                            | -  | 2                | 45,96      | 48                         | 5,1                   |

**Specifications**


**General characteristics**

|                                    |                       |
|------------------------------------|-----------------------|
| Motor                              | 801400                |
| Nominal motor power at 24 V (W)    | 30 W                  |
| Axial load dynamic (N)             | 100                   |
| Radial load dynamic (N)            | 50 / 70* / 120**      |
| Efficiency (%)                     | 90 / 80* / 70**       |
| Gearbox case temperature rise (°C) | 35                    |
| Weight (g)                         | 1600 / 1900* / 2200** |
| Protection index                   | IP54                  |

**Comments**

**Dimensions (mm)**

**801496 with SNI10**

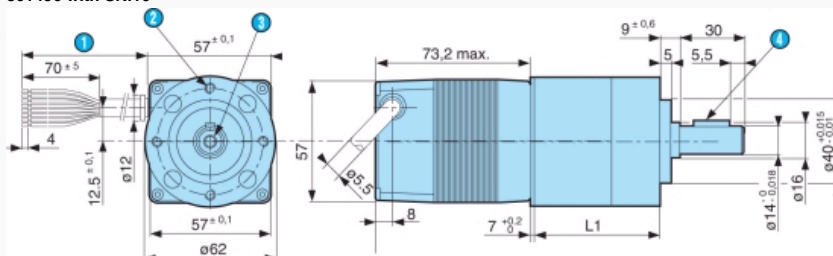

| N° | Legend                               |
|----|--------------------------------------|
| 1  | Length of cable 400 ± 10 mm          |
| 2  | 4 holes M5 depth 10 at 90° over Ø 52 |
| 3  | Fixing hole M5, depth 12.5           |
| 4  | Key A5 x 5 x 18 DIN 6885 A           |
|    | L1 1 stage : 45.7 mm max.            |
|    | L1 2 stages : 61.5 mm max.           |
|    | L1 3 stages : 77.4 mm max.           |

**Precautions for use**

The limits and precautions for use described in the 30 W brushless motor section must be observed.

**Product adaptations**



- With integrated electronic controls SNI10 or TNI20
- No lead output but connector in motor
- Dimensions of gearbox shaft
- Cable length, with or without connector
- Open-loop control in 2 quadrants
- Low-noise version
- Other windings
- Other reduction ratios
- Mechanical holding brake