

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)

[CA3108E14S-2PYBF80](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

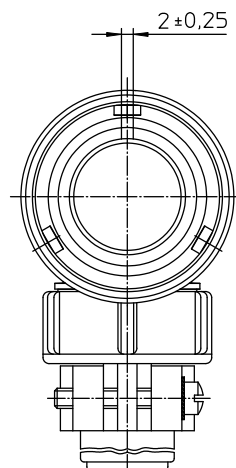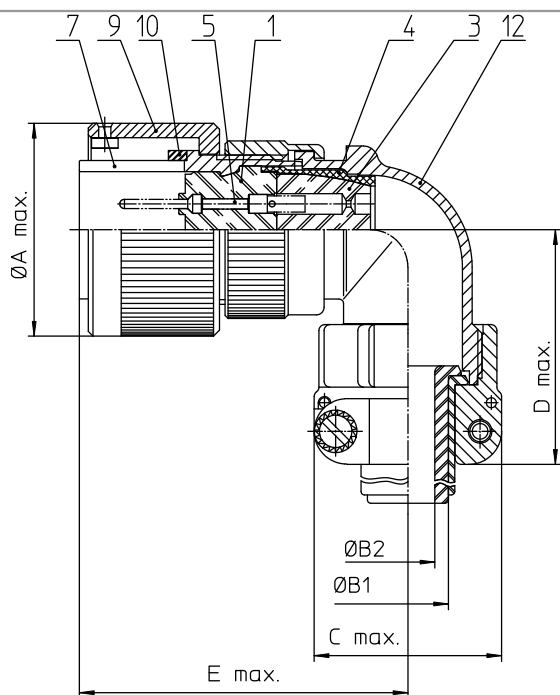

NO.	MASSE / DIMENSION
A	29.2
B1	9.1
B2	-
C	27.5
D	42
E	47

NO.	BESCHREIBUNG / DESCRIPTION
1	ISOLIERKÖRPER STIFT / INSULATOR PIN
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
5	KONTAKTSTIFT / CONTACT PIN
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
12	ENDGEHÄUSE / ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.	
Specification and Dimensions subject to change. Drawings illustrate normal insulator positioning.	
Material Specification:	
Shell Material:	Aluminum alloy
Shell Plating:	Olive drab chromate over cadmium (conductive)
Insulator Material:	CR-Elastomere
Contact Material:	Copper alloy
Contact Plating:	Hard silver

All dimensions are in mm. Dimensions without tolerance indications are general tolerances in acc. with DIN7168m.		drawing for
CUSTOMER		
 ITT <i>Engineered for life</i> ITT Cannon GmbH 71634 Metzingen, Germany	description	
	CA3108E14S-2PYB-F80	
	Plug 90° Endbell with clamp and bushing AWG Crimp / Pin / Layout: 14S-2	
© All rights reserved. Reproduction or reuse in any form without the prior written authorization of ITT Cannon.		 page 1/1  revision 786.4, Jul 16