

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3108R18-9SF80](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

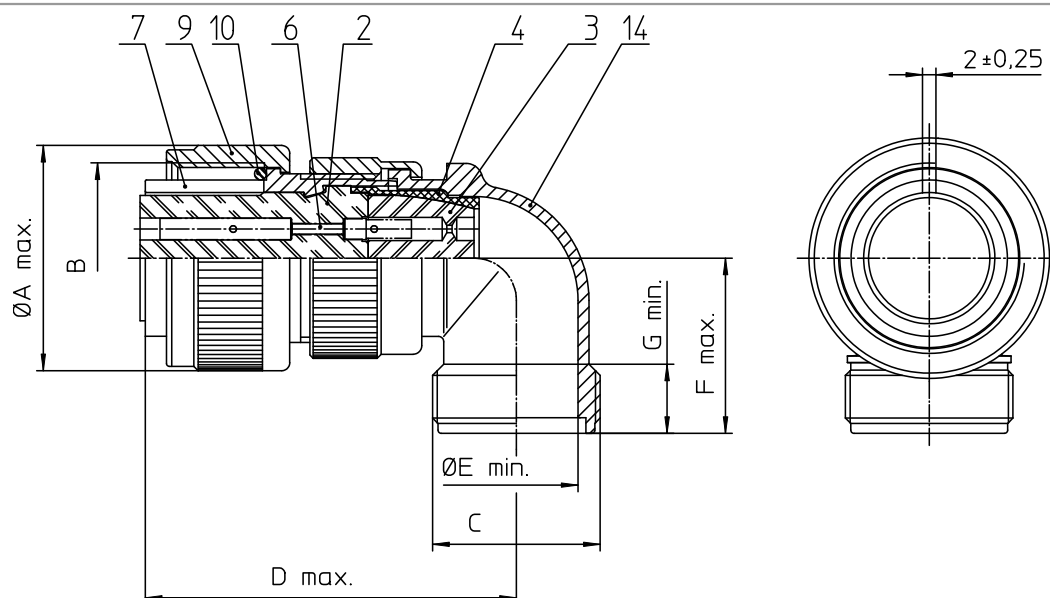

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 34.1              |
| B   | 1 1/8-18NEF-2B    |
| C   | 1-20UNEF-2A       |
| D   | 32.2              |
| E   | 18.4              |
| F   | 27.5              |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 12  | ENDGEHÄUSE / ENDBELL                    |



|                                                                                                   |                                                  |
|---------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.           |                                                  |
| Specification and Dimensions subject to change. Drawings illustrate normal insulator positioning. |                                                  |
| Material Specification:                                                                           |                                                  |
| Shell Material:                                                                                   | Aluminium alloy                                  |
| Shell Plating:                                                                                    | Olive drab chromate coating over cadmium plating |
| Insulator Material:                                                                               | Neoprene                                         |
| Contact Material:                                                                                 | Copper alloy                                     |
| Contact Plating:                                                                                  | Hard silver                                      |

|                                                                                                                                                                                                |  |                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                              |  | drawing for<br>CUSTOMER                                                                                                              |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GMBH<br/>D-71334 Wernau/Germany</small> |  | description: CA3108R18-9S-F80<br>Plug 90°<br>Shortened light-weight endbell without cable clamp<br>AWG Crimp / Socket / Layout: 18-9 |
| © All rights reserved. Reproduction or reuse in any form without written authorization of ITT Cannon                                                                                           |  | page: 1/1<br>revision: 377.3, Jul 16                                                                                                 |