

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3106F24A24PB](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

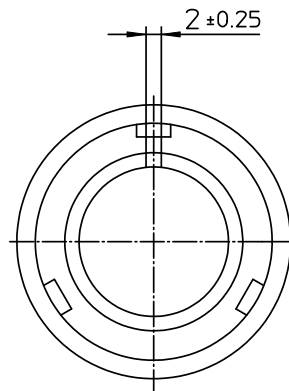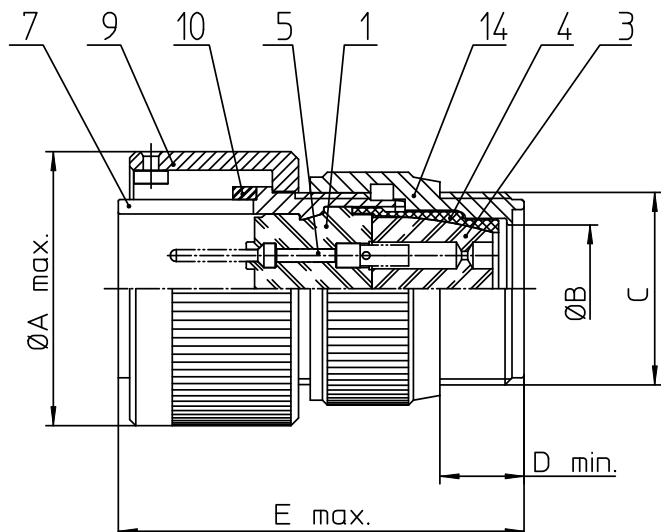

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 46.6              |
| B   | 25.4              |
| C   | 1 7/16-18UNEF-2A  |
| D   | 9.5               |
| E   | 59                |

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICHTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT / CONTACT PIN           |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 14  | F-ENDGEHÄUSE / F-ENDBELL             |

|                                                                                                    |                                               |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |                                               |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |                                               |
| Material Specification:                                                                            |                                               |
| Shell Material:                                                                                    | Aluminium alloy                               |
| Shell Plating:                                                                                     | Olive drab chromate over cadmium (conductive) |
| Insulator Material:                                                                                | CR-Elastomere                                 |
| Contact Material:                                                                                  | Copper alloy                                  |
| Contact Plating:                                                                                   | Hard silver                                   |

|                                                                                                                   |                                                                             |                         |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m |                                                                             | drawing for<br>CUSTOMER |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GMBH<br/>D-73844 Heimenkirch / Germany</small>  | description CA3106F24A24P-B                                                 |                         |
|                                                                                                                   | Plug, straight<br>Endbell for flex tube<br>Solder Cup / Pin / Layout: 24A24 |                         |
| © All rights reserved. Reproduction or issue in any form without prior written authorization of ITT Cannon        | <br>page 1/1                                                                | revision 786.4, Jul 16  |