

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3108F22-2PBF80](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

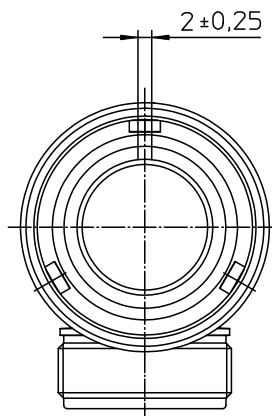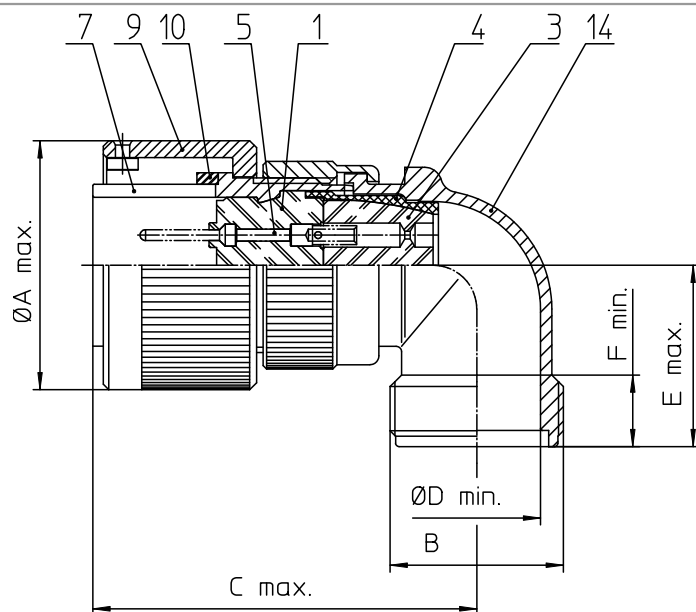

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 43.1              |
| B   | 1 3/16-18UNEF-2A  |
| C   | 61                |
| D   | 24.6              |
| E   | 30                |
| F   | 9.4               |

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICHTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT / CONTACT PIN           |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 14  | F-ENDGEHÄUSE / F-ENDBELL             |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.  
Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Material Specification: |                                               |
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

|                                                                                                                                                                                                   |                                                                                                        |                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                 |                                                                                                        | drawing for<br>CUSTOMER            |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D-71365 Weinstadt/Germany</small> | description CA3108F22-2P-B-F80<br>Plug, 90°<br>Endbell for flex tube<br>AWG Crimp / Pin / Layout: 22-2 |                                    |
| © All rights reserved. Reproduction or use in third in any form without the written authorization of ITT Cannon.                                                                                  |                                                                                                        | page 1/1<br>revision 796 4, Jul 16 |