

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3106R24-12SBF80](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

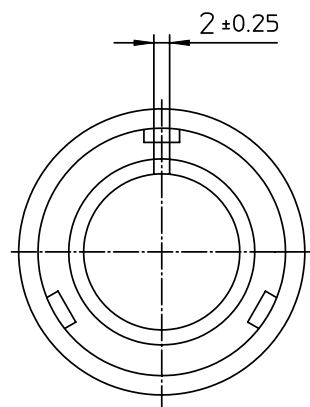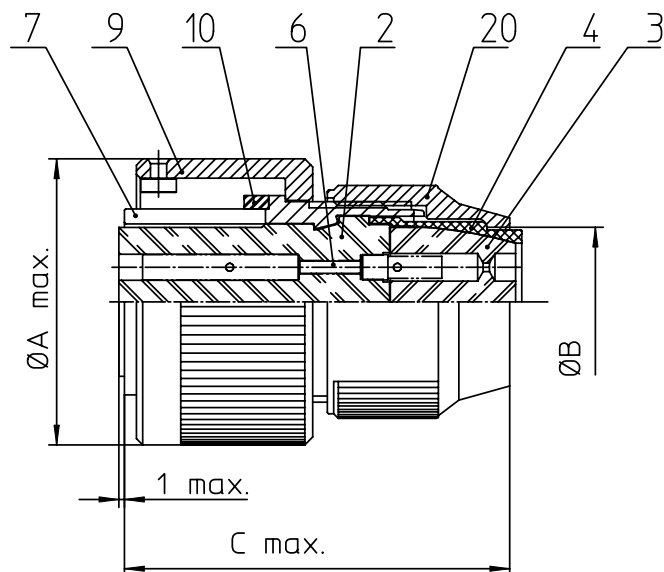

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 46.6              |
| B   | 27.6              |
| C   | 53                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 20  | KURZES ENDGEHÄUSE/SHORT ENDBELL         |



|                                                                                                    |                                               |
|----------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |                                               |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |                                               |
| Material Specification:                                                                            |                                               |
| Shell Material:                                                                                    | Aluminium alloy                               |
| Shell Plating:                                                                                     | Olive drab chromate over cadmium (conductive) |
| Insulator Material:                                                                                | CR-Elastomere                                 |
| Contact Material:                                                                                  | Copper alloy                                  |
| Contact Plating:                                                                                   | Hard silver                                   |

|                                                                                                                                                                                                   |                                                                                                            |                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                 |                                                                                                            | drawing for<br>CUSTOMER |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D-73544 Winnenden/Germany</small> | description CA3106R24-12S-B-F80                                                                            |                         |
|                                                                                                                                                                                                   | Plug, straight<br>Shortened light-weight endbell without cable clamp<br>AWG Crimp / Socket / Layout: 24-12 |                         |
| © All rights reserved. Reproduction or issue in any form<br>whatever is only permitted with written authorization of ITT Cannon                                                                   | page 1/1                                                                                                   | revision 786 4, Jul 16  |