

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3106F28-15SBF80F0](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

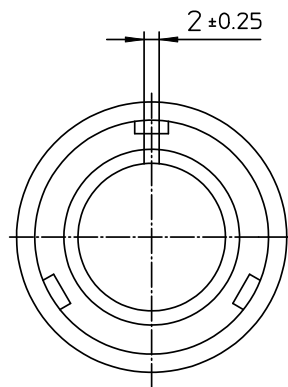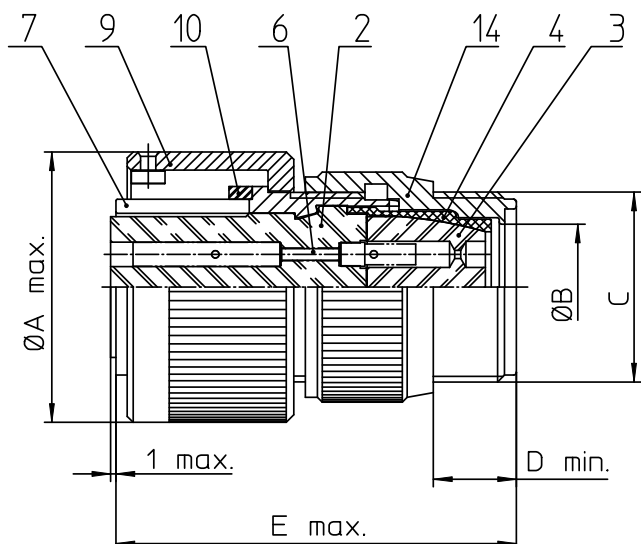

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B   | 27                |
| C   | 1 7/16-18UNEF-2A  |
| D   | 9.5               |
| E   | 60                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 14  | F-ENDGEHÄUSE / F-ENDBELL                |

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |
| Material Specification:                                                                            |
| Shell Material: Aluminium alloy                                                                    |
| Shell Plating: Olive drab chromate over cadmium (conductive)                                       |
| Insulator Material: CR-Elastomere                                                                  |
| Contact Material: Copper alloy                                                                     |
| Contact Plating: Hard silver                                                                       |

|                                                                                                                                                                                                |                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                              | drawing for<br>CUSTOMER                                                                                             |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GMBH<br/>D-71084 Wernau/Germany</small> | description CA3106F28-15S-B-F80-F0<br>Plug, straight<br>Endbell for flex tube<br>AWG Crimp / Socket / Layout: 28-15 |
| © All rights reserved. Reproduction or issue to third in any form without written authorization of ITT Cannon                                                                                  | page 1/1<br>revision 786 4, Jul 16                                                                                  |