

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3106E28-21SBA176](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

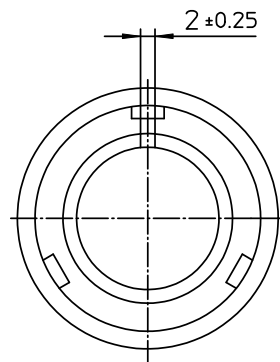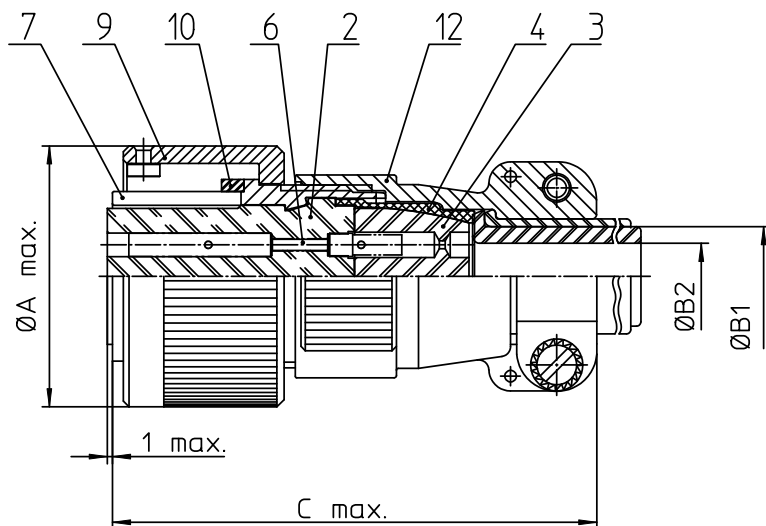

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 53.4              |
| B1  | 21.5              |
| B2  | 16.6              |
| C   | 76                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 10  | DICHTRING FRONT / FRONT SEALING RING    |
| 12  | ENDGEHÄUSE / ENDBELL                    |

|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |
| Material Specification:                                                                            |
| Shell Material: Aluminium alloy                                                                    |
| Shell Plating: Olive drab chromate over cadmium (conductive)                                       |
| Insulator Material: CR-Elastomere                                                                  |
| Contact Material: Copper alloy                                                                     |
| Contact Plating: Gold 0,5 µm                                                                       |

|                                                                                                                                                                            |                                                                                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                          | drawing for<br>CUSTOMER                                                                                                     |
| <br><b>ITT</b><br>Engineered for life<br>ITT CANNON GmbH<br>D-71334 Weinstadt/Germany | description CA3106E28-21S-B-A176<br>Plug, straight<br>Endbell with clamp and bushing<br>Solder Cup / Socket / Layout: 28-21 |
| © All rights reserved. Reproduction or issue to third in any form<br>whenever is only permitted with written authorization of ITT Cannon                                   | page 1/1<br>revision 786 4. Jul 16                                                                                          |