

## Excellent Integrated System Limited




Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3108R36-9P](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

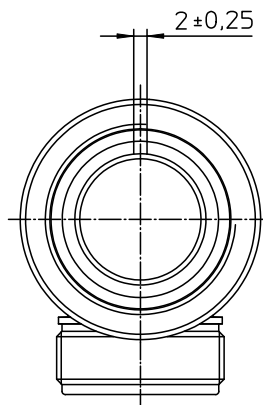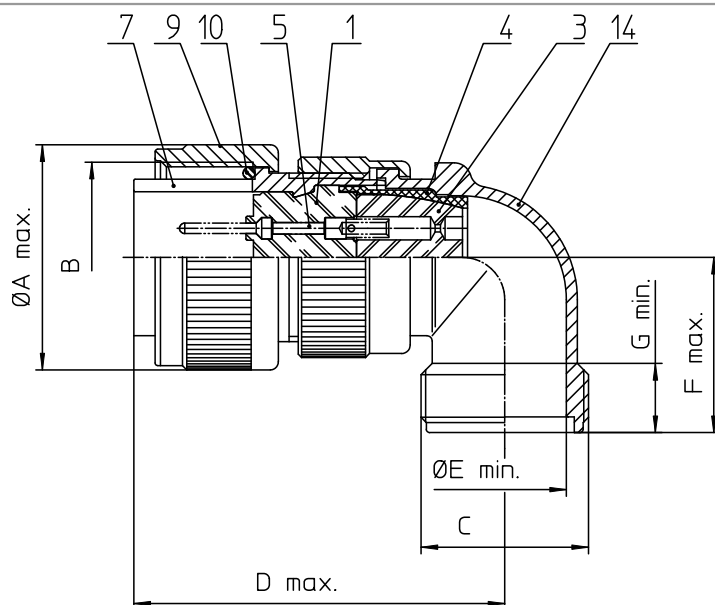

L-3609-P

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 62.8              |
| B   | 2 1/4-16UN-2B     |
| C   | 2-18NS-2A         |
| D   | 58                |
| E   | 43.6              |
| F   | 46.0              |

| NO. | BESCHREIBUNG / DESCRIPTION           |
|-----|--------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN  |
| 3   | DICHTKÖRPER / GROMMET                |
| 4   | ENDRING / ENDRING                    |
| 5   | KONTAKTSTIFT/ CONTACT PIN            |
| 7   | ZYLINDERGHÄUSE / BARREL              |
| 9   | ÜBERWURFMUTTER / COUPLING NUT        |
| 10  | DICHTRING FRONT / FRONT SEALING RING |
| 12  | ENDGEHÄUSE / ENDBELL                 |

|                                                                                         |
|-----------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential. |
| Specification and Dimensions subject to change                                          |
| Drawings illustrate normal insulator positioning                                        |
| Material Specification:                                                                 |
| Shell Material: Aluminium alloy                                                         |
| Shell Plating: Olive drab chromate coating over cadmium plating                         |
| Insulator Material: Neoprene                                                            |
| Contact Material: Copper alloy                                                          |
| Contact Plating: Hard silver                                                            |

|                                                                                                   |                                                                                        |                        |
|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------|
| all dimensions are in mm                                                                          | Dimensions without tolerance indications are general tolerances in acc. with DIN 7168m | drawing for            |
| description                                                                                       | CA3108R36-9P                                                                           | CUSTOMER               |
| ITT                                                                                               | Plug 90°                                                                               |                        |
| Engineered for life                                                                               | Shortened light-weight endbell without cable clamp                                     |                        |
| ITT CANNON GERMANY                                                                                | Solder Cup / Pin / Layout: 36-9                                                        |                        |
| © All rights reserved. Reproduction or issue in any form without written permission of ITT Cannon | page 1/1                                                                               | revision 377.3, Jul 16 |