

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[KPSE6E22-55PDZ](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

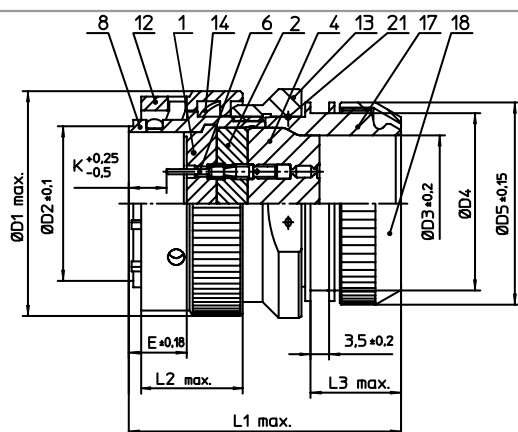

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| D1  | 42.1              |
| D2  | 30.3              |
| D3  | 27                |
| D4  | 34.5              |
| D5  | 38                |
| E   | 8.02              |
| K   | 3.73              |
| L1  | 53                |
| L2  | 25.1              |
| L3  | 18                |

| NO. | BESCHREIBUNG / DESCRIPTION               |
|-----|------------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN      |
| 2   | ISOLIERKÖRPER MITTE / WAYER              |
| 4   | DICHTKÖRPER / GROMMET                    |
| 6   | KONTAKT STIFT / CONTACT PIN              |
| 8   | GEHÄUSE / RECEPTACLE                     |
| 12  | ÜBERWURFMUTTER / COUPLING NUT            |
| 13  | ÜBERWURFMUTTER F. ENDGEH. / COUPLING NUT |
| 14  | WELLFEDER / WASHER                       |
| 17  | ADAPTER / ADAPTER                        |
| 18  | KLEMM-MUTTER / CLAMP NUT                 |
| 21  | DRAHT / FIXING WIRE                      |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                          |
|-------------------------|------------------------------------------|
| Material Specification: |                                          |
| Shell Material:         | Aluminium alloy                          |
| Shell Plating:          | Olive drab chromate over cadmium plating |
| Insulator Material:     | Polychloroprene                          |
| Contact Material:       | Copper alloy, gold plated                |
| Contact Plating:        | Copper alloy, gold plated                |

all dimensions are in mm

Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for

CUSTOMER



**ITT**

Engineered for life  
ITT CANNON GERMANY  
D-73584 Weinstadt-Germersheim

description KPSE6E2255P-DZ  
Straight plug  
Endbell for shielding braids and shrink boots  
Crimp Contacts / Pin / Layout: 22-55

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page  
1/1

revision

1012 5. Jul 16