

## Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[E-Switch](#)  
[200USP1T1A1M6RE](#)



For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

SHEET 1 OF 1



▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
5-6	N/A	5-4

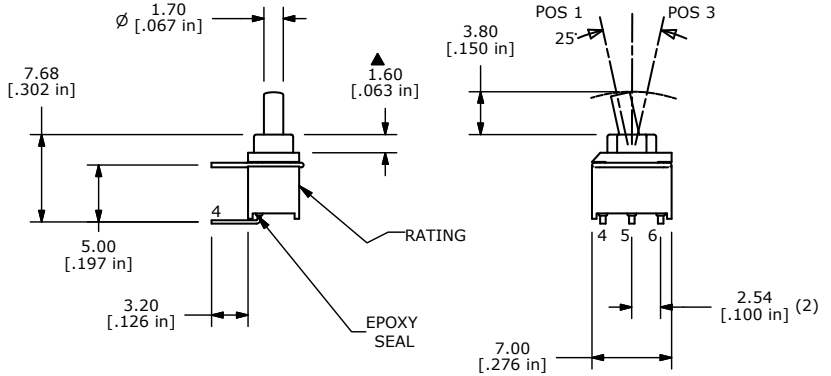

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  - ▲ 4. STATIONARY CONTACTS: COPPER ALLOY W/GOLD PLATING
  - ▲ 5. MOVING CONTACTS: COPPER ALLOY W/ GOLD PLATING
  5. RATING: 0.4 VA max. @ 20V AC OR DC max.
  6. CONTACT RESISTANCE: <100 MILLI-OHM
  7. MECHANICAL LIFE: 40,000 MAKE-AND-BREAK CYCLES.
  8. INSULATION RESISTANCE: 500 MEGA-OHM min.
  9. DIELECTRIC STRENGTH: 500 V RMS @SEA LEVEL.
  10. OPERATING TEMP.: -30°C to 85°C
  11. ▲ DENOTES CRITICAL PARAMETER.
  12. SEAL RATING: IP67
  13. 2002/95/EC (ROHS) COMPLIANT



REV	PCR NO	DESCRIPTION	DATE	BY
B	19606	UPDATE PLATING NOTE	01/20/11	BMA
A	19141	New Release	6/15/10	rc

TITLE 200USP1T1A1M6RE				
SCALE 2:1	DATE 2/12/2010	DR RC	DWG T250001	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED