

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2322333](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Extract from the online
catalog

VIP-2/SC/2FLK14/AB-1756

Order No.: 2322333

The figure shows a version with SIEMENS labeling

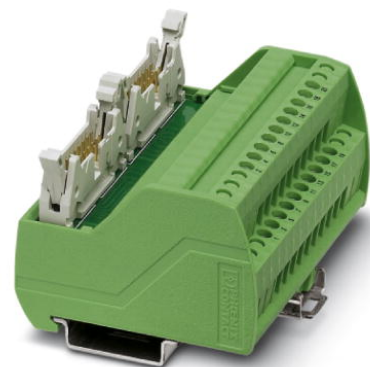

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322333>

VARIOFACE COMPACT LINE, interface module for Allen-Bradley
Controll-Logix, with Controll-Logix-specific labeling, no. of positions: 2
x 14, module width: 98 mm



Commercial data

GTIN (EAN)	4046356451734
sales group	I550
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1674 KG
Catalog page information	Page 232 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
06/03/2009



<http://www.download.phoenixcontact.com>
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	60 V AC/DC
Max. current carrying capacity per branch	1 A
Max. total current of voltage supply	max. 3 A (/Byte)
Number of positions	14

VIP-2/SC/2FLK14/AB-1756 Order No.: 2322333

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322333>

Width	80.6 mm
Height	65.5 mm
Depth	56 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN VDE 0109-11
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	Field level
Type of connection	Spring-cage connection
Number of positions	14
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	6 mm
Connection 2	Control system level
Number of connections	2
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14

Certificates / Approvals


Certification CUL, UL

CUL

Nominal voltage U _N	125 V
--------------------------------	-------

VIP-2/SC/2FLK14/AB-1756 Order No.: 2322333
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322333>


Nominal current I_N	1 A
AWG/kcmil	30-12

UL

Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

Diagrams/Drawings

Circuit diagram

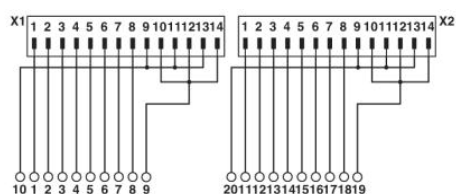

VIP-2/SC/2FLK14/AB-1756 connection scheme

VIP-2/SC/2FLK14/AB-1756 Order No.: 2322333
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322333>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;