

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2322401](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

VIP-2/SC/HD15SUB/F

Order No.: 2322401

The figure shows a 3-level, 44-pos. version with a female connector



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322401>

VARIOFACE module, with screw connection and high density D-Subminiature female connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 15, width: 44.9 mm



Commercial data

GTIN (EAN)	4046356451703
sales group	I501
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1094 KG
Catalog page information	Page 289 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
06/03/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	125 V
Max. current carrying capacity per branch	1 A
Number of positions	15
Width	44.9 mm

VIP-2/SC/HD15SUB/F Order No.: 2322401

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322401>

Height	65.5 mm
Depth	45.1 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Number of positions	15
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

Certificates / Approvals


Certification CUL, UL

CUL

Nominal voltage U _N	125 V
Nominal current I _N	1 A
AWG/kcmil	30-12

UL


Nominal voltage U _N	125 V
Nominal current I _N	1 A
AWG/kcmil	30-12

VIP-2/SC/HD15SUB/F Order No.: 2322401


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322401>

Diagrams/Drawings

Circuit diagram

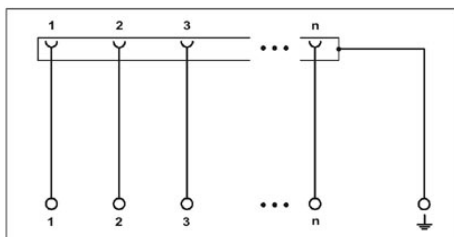

Schematic diagram

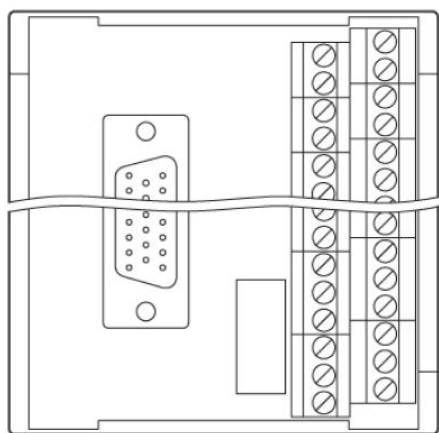

VIP-2/SC/HD15SUB/F Order No.: 2322401

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322401>

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;