

Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[OSTTZ050100](#)



For any questions, you can email us directly:

sales@integrated-circuit.com

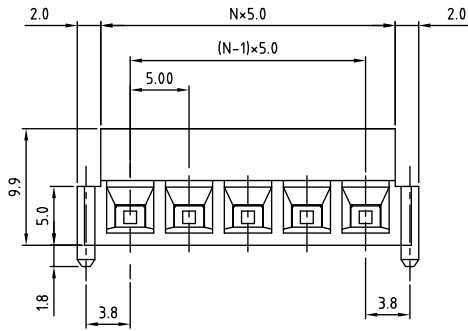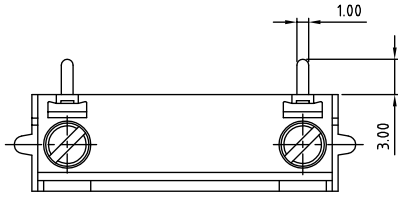

N=Number of poles(2pole-7pole)

RECOMMENDED P.C.B LAYOUT

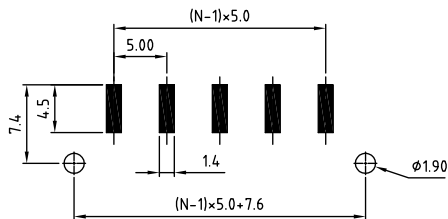

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
(metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 6A
- Wire range:
Solid wire(AWG): 14-30
Stranded wire(AWG): 14-30
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Soldering temperature: 260°C±10°C/5 Sec SUITABLE FOR REFLOW

RoHS Compliant

PART NUMBER:

OSTTZXX0100

No. of Poles
02 2 Poles
03 3 Poles
...
07 07 Poles

COLOR
0: Black



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE	OSTTZ 5.0mm series w/out cover						
PART NO.	OSTTZXX0100	DWG NO.	OSTTZXX0100.DWG				
APPROVED	Shi Jun 2006.10.23	CHECKED	Marvin 2006.10.23	DESIGNED	Marvin 2006.10.23	DRAWN	Marvin 2006.10.23
				SHEET: 01/01		REV.: A	
				UNIT: mm		Tolerance	
				SCALE: NONE		X. ±0.50	
						X.X ±0.30	
						X.XX ±0.10	
						X* ±1°	