

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1693704](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

SAC-10P- 5,0-PUR/M16FR


Order No.: 1693704



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1693704>

Master cable, Number of slots: 6, Number of positions: 10, Status indication: No, PUR/PVC, Cable length: 5 m, Shielding: No

Commercial data

GTIN (EAN)	 4 017918 189044
sales group	D192
Pack	1 pcs.
Customs tariff	85444290
Catalog page information	Page 126 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
07/06/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Rated voltage	125 V AC
	150 V DC

SAC-10P- 5,0-PUR/M16FR Order No.: 1693704

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1693704>

Number of positions	10
Number of slots	6
Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)

Master cable data

Type of connection	M16 plug connection
Length of cable	5 m
Cable type	Master cable suitable for flexible cable conduit
Signal line cross section	6x 0.34 mm ²
AWG signal line	22
Conductor structure signal line	42x 0.10 mm
Power supply cross section	2x 0.75 mm ²
AWG power supply	18
Conductor structure, voltage supply	96x 0.10 mm
External diameter	8.2 mm
Max. bending cycles	1500000
Bending radius	100 mm
Traversing path	2 m
Traversing rate	2 m/s
Ambient temperature (operation)	-40 °C ... 90 °C (for fixed installation)
	-5 °C ... 80 °C (for flexible installation)

Insulation material

Housing material	PUR
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of the contact carrier on the master cable side	TPU
Material of threaded sleeve	Cu alloy
Material of threaded sleeve surface	Nickel-plated
Sealing material	NBR

Connection assignment

Slot/position = pin = conductor color	1 / 4 (A) = P = WH
---------------------------------------	--------------------

SAC-10P- 5,0-PUR/M16FR Order No.: 1693704

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1693704>

	2 / 4 (A) = J = GN
	3 / 4 (A) = T = YE
	4 / 4 (A) = S = GY
	5 / 4 (A) = G = PK
	6 / 4 (A) = R = RD
	1-6 / 1 (+ 120 V) = A+M = BN
	1-6 / 3 (0 V) = L+U = BU

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Circuit diagram

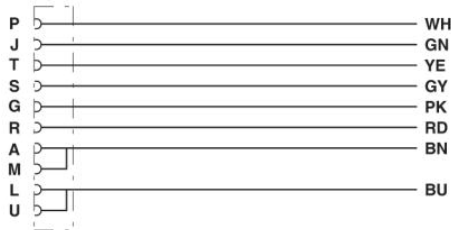

SAC-10P- 5,0-PUR/M16FR Order No.: 1693704

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1693704>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;