

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1506914](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

SACC-M 8MS-4CON-M-SH

Order No.: 1506914



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1506914>

Sensor/actuator connector, male, straight, 4-pos., M8, shielded, solder connection, metal knurl, cable diameter max. 5 mm

Commercial data	
GTIN (EAN)	 4 017918 881184
sales group	D121
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 42 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/21/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Rated current at 40°C	4 A
Rated voltage	30 V
Number of positions	4
Volume resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ

SACC-M 8MS-4CON-M-SH Order No.: 1506914

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1506914>

Ambient temperature (operation)	-40 °C ... 85 °C (Male connector / female connector)
General characteristics	
Standards/regulations	M8 connector IEC 61076-2-104
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuSn
Contact surface material	Au
Contact carrier material	PUR / PA66
Material of grip body	Nickel-plated brass
Material, knurls	Nickel-plated brass
Sealing material	NBR
Type of connection	Solder cup
Conductor cross section stranded min.	0.08 mm ²
Conductor cross section stranded max.	0.34 mm ²
Conductor cross section AWG/kcmil min.	28
Conductor cross section AWG/kcmil max	22
External cable diameter	3.5 mm ... 5 mm
Status display	No

Certificates / Approvals



Certification


GOST

SACC-M 8MS-4CON-M-SH Order No.: 1506914

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1506914>


Diagrams/Drawings

Diagram

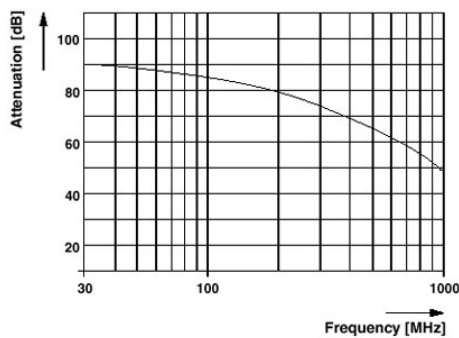


Attenuation curve of the SACC... male/female connectors


Functional drawing



Slide parts onto the conductor




Strip conductor, widen shield and lay around the shielding ring, cut off projecting mesh.



Slide cores through the housing, mount shielding ring, gasket and clamping cage. Tighten pressure screw to fix the cable. Solder on cores, mount male/female connector part and tighten pressure screw.

Assembly steps for M8 male/female connector and conductor

Dimensioned drawing

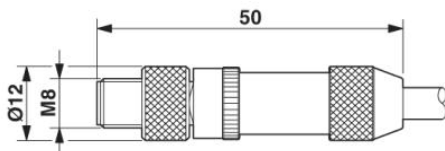


Plug M8 x 1, straight, shielded

SACC-M 8MS-4CON-M-SH Order No.: 1506914

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1506914>

Schematic diagram

Pin assignment M8 plug, 4-pos., view male side

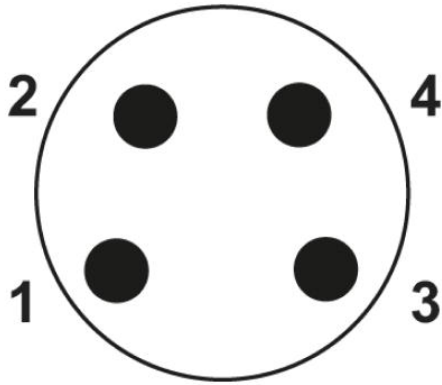

SACC-M 8MS-4CON-M-SH Order No.: 1506914

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1506914>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;