

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1512571](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

SACC-M12FS-5SC SH

Order No.: 1512571



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1512571>

Sensor/actuator connector, female, straight, 5-pos., M12, shielded, A-coded, spring-cage connection, metal knurl, cable cross section max. 8 mm

Commercial data

GTIN (EAN)	
sales group	D124
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 383 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
12/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 8 mΩ

SACC-M12FS-5SC SH Order No.: 1512571

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1512571>

Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-40 °C ... 85 °C (Male connector / female connector)

General characteristics

Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Nickel-plated brass
Sealing material	NBR
Type of connection	Spring-cage conn.
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	20
External cable diameter	4 mm ... 8 mm
Status display	No

Certificates / Approvals


Certification


CUL, UL

SACC-M12FS-5SC SH Order No.: 1512571

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1512571>

Diagrams/Drawings

Functional drawing

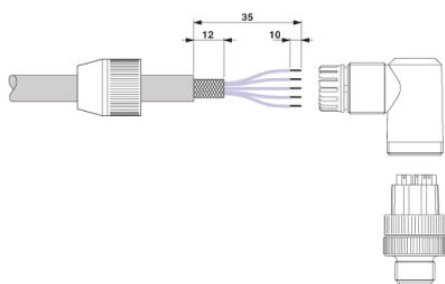


Assembly of the shielded conductor

1) For straight version: 28 mm


Slide the pressure nut onto the cable, strip the cable, shorten the shield, strip the cores. Thread the cores through the housing and connect them. Screw the body of the connector onto the housing. Tighten the pressure nut.

Dimensioned drawing

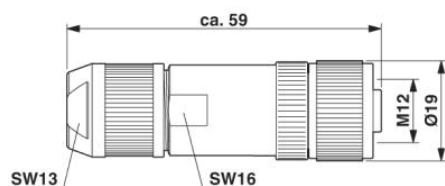

M12 x 1 female connector, straight, shielded

Schematic diagram

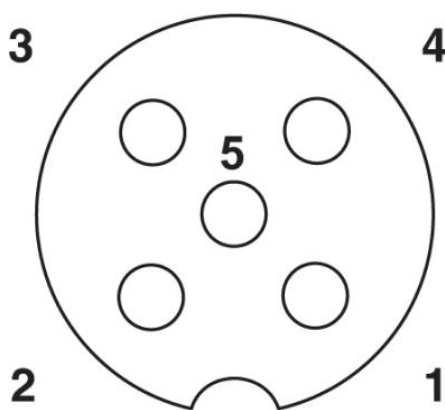

Pin assignment M12 socket, 5-pos., A-coded, socket side view

SACC-M12FS-5SC SH Order No.: 1512571

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1512571>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;