

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1507764](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

SACC-M12MSB-5CON-PG9 SH AU


Order No.: 1507764



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507764>

Bus system plug connector, male straight, 5-pos., M12, shielded, gold-plated contacts, B-coded, screw connection, metal knurl, cable screw connection Pg9



Commercial data	
GTIN (EAN)	 4 017918 900427
sales group	D120
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 51 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
11/23/2005



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ

SACC-M12MSB-5CON-PG9 SH AU Order No.: 1507764
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507764>

Insulation resistance	≥ 100 MΩ
Ambient temperature (operation)	-40 °C ... 85 °C (Male connector / female connector)

General characteristics

Standards/regulations	M12 connector IEC 61076-2-101
Coding	B - inverse
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Nickel-plated brass
Sealing material	NBR
Type of connection	Screw connection
Conductor cross section stranded min.	0.25 mm ²
Conductor cross section stranded max.	0.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	18
External cable diameter	6 mm ... 8.5 mm
Status display	No

Certificates / Approvals



Certification


GOST

SACC-M12MSB-5CON-PG9 SH AU Order No.: 1507764
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507764>


Diagrams/Drawings

Functional drawing


Assembly steps for M 12 male/female connector and conductor




Slide parts onto the conductor



Strip conductor, widen shield and lay around the shielding ring, cut off projecting mesh.

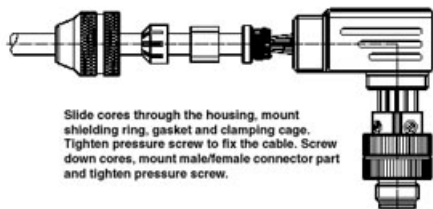

Dimensioned drawing

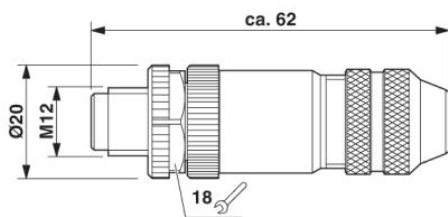


M12 x 1 male connector, straight, shielded


SACC-M12MSB-5CON-PG9 SH AU Order No.: 1507764

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507764>

Schematic diagram

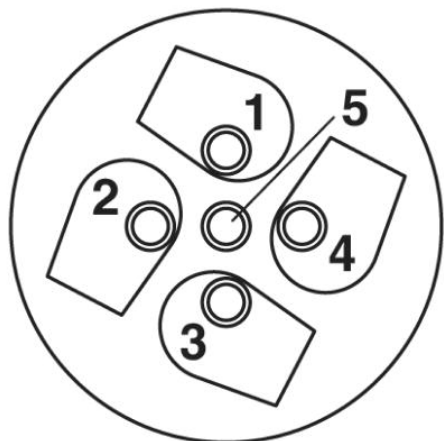

Cable connection side M12 (screw connection)

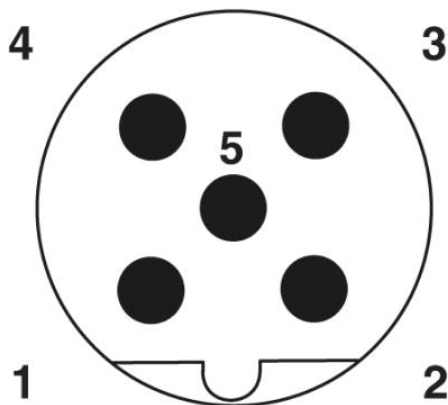

Pin assignment M12 male connector, 5-pos., B-coded, male side

SACC-M12MSB-5CON-PG9 SH AU Order No.: 1507764
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507764>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;