

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1521290](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog


## SACC-MINMS-3CON-PG13

Order No.: 1521290



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1521290>

Sensor/actuator connector, male, straight, 3-pos., 7-8", screw connection, metal knurl, cable screw connection Pg13

Commercial data	
GTIN (EAN)	 4 017918 949525
sales group	D120
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 53 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/21/2006



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Rated current at 40°C	12 A
Rated voltage	250 V
Number of positions	3
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ

SACC-MINMS-3CON-PG13 Order No.: 1521290

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1521290>

Ambient temperature (operation)	-25 °C ... 85 °C (Male connector / female connector)
<b>General characteristics</b>	
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PUR / PA66
Material of grip body	PBT
Material, knurls	Zinc die-cast, (nickel-plated)
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	16
External cable diameter	10 mm ... 12 mm
Status display	No

### Certificates / Approvals




Certification

CUL, UL

### Diagrams/Drawings


Functional drawing

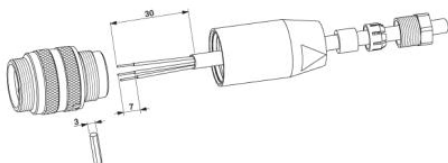

SACC-MINMS-3CON-PG13 Order No.: 1521290


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1521290>

Dimensioned drawing

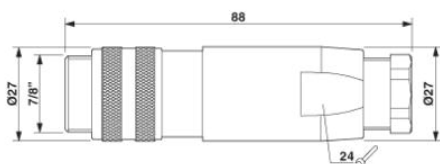

Plug 7/8"-16UNF, straight, Pg13

Schematic diagram

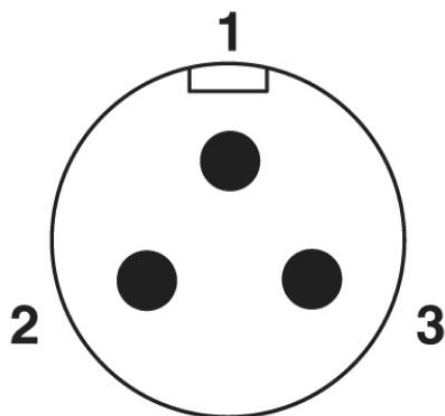

Pin assignment, plug, 7/8"-16UNF, 3-pos., view of male side

SACC-MINMS-3CON-PG13 Order No.: 1521290

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1521290>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;