

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[3201369](#)

For any questions, you can email us directly:

sales@integrated-circuit.com




Extract from the online
catalog

AI 0,5 - 8 WH-B

Order No.: 3201369

The illustration shows version AI 1,5 - 8 in red

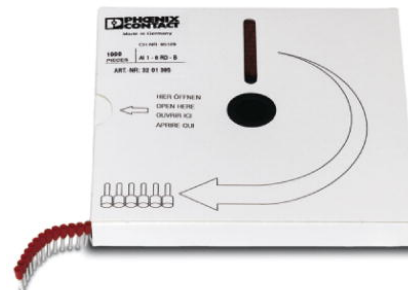

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3201369>

Ferrules, 0.5 mm², taped, sleeve length: 8 mm, with plastic collar, galvanically tin-plated, color: white, color range according to DIN 46228-4, CSA-certified

Commercial data

GTIN (EAN)	
sales group	B256
Pack	1000 pcs.
Customs tariff	85369010
Catalog page information	Page 660 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
11/07/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Length (b)	14 mm
Color	white
Material	E-CU
Sleeve length	8 mm

AI 0,5 - 8 WH-B Order No.: 3201369

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3201369>

Inner dimension of the insulating collar (d)	2.5 mm
Ferrule diameter	1.1 mm
Insulating collar thickness	0.25 mm
Sleeve wall thickness	0.15 mm

Certificates / Approvals




Certification

CSA, CSAus

Diagrams/Drawings

Dimensioned drawing

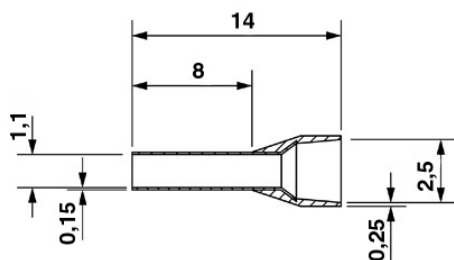

AI 0,5 - 8 WH-B Order No.: 3201369

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3201369>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;