

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1687710](#)

For any questions, you can email us directly:
sales@integrated-circuit.com



Extract from the online catalog

HC-B 16-KML-80/M1PG21

Order No.: 1687710



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1687710>

HEAVYCON coupling housing B16, with single locking latch, height 80 mm, with screw connection 1x Pg21

Commercial data	
GTIN (EAN)	 4 017918 837792
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 489 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Design	B16
Height	80 mm
Width	43 mm
Length	94 mm

HC-B 16-KML-80/M1PG21 Order No.: 1687710

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1687710>

Housing type	Coupling housings
Locking type	With single locking latch
Type of the screw connection	1x Pg21
Pg screw connection	With
Wrench size, union nut	28 mm
External cable diameter	10 mm ... 19 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

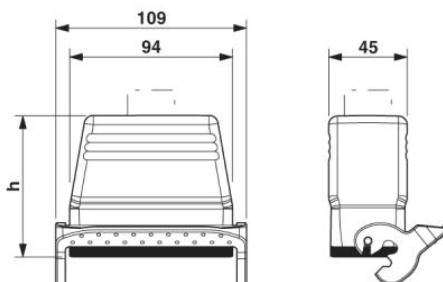

HC-B 16-KML-80/M1PG21 Order No.: 1687710

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1687710>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;