

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1584596](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

HC-B 24-TMZ-76/O1STM32G

Order No.: 1584596

The illustration shows a product version with lateral conductor exit



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1584596>

HEAVYCON sleeve housing B24, with main latch, height 76 mm, with
1 x M32 thread, straight conductor outlet

Commercial data

GTIN (EAN)	
sales group	D002
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 502 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
08/02/2006



<http://www.download.phoenixcontact.com>
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B24, BB46, D64, DD108, M
Design	B24
Height	76 mm
Width	43 mm
Length	120 mm


HC-B 24-TMZ-76/O1STM32G Order No.: 1584596

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1584596>

Housing type	Sleeve housings
Locking type	With main latch
Cable exit	Straight
Type of the screw connection	1x M32
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Material lock	Steel, galvanized

Diagrams/Drawings

Dimensioned drawing

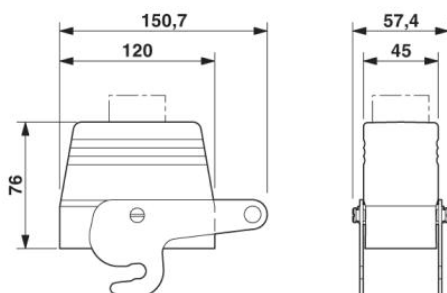

HC-B 24-TMZ-76/O1STM32G Order No.: 1584596

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1584596>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;