

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1647310](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog


## HC-B 48-TFL-96/O1STM40G

Order No.: 1647310



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647310>

HEAVYCON sleeve housing B48, for single locking latch, height 96 mm, with thread 1x M40, straight conductor exit

Commercial data	
GTIN (EAN)	 4 017918 969462
sales group	D002
Pack	1 pcs.
Customs tariff	85389099
Catalog page information	Page 506 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Note	For contact inserts HC-B48, DD216, M
Design	B48
Height	96 mm
Width	89 mm
Length	131.5 mm


HC-B 48-TFL-96/O1STM40G Order No.: 1647310

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647310>

Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Straight
Type of the screw connection	1x M40
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray

### Diagrams/Drawings

Dimensioned drawing

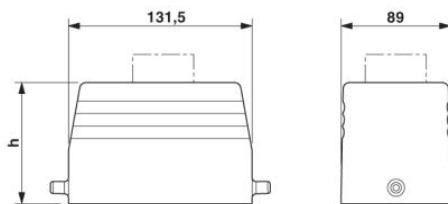

HC-B 48-TFL-96/O1STM40G Order No.: 1647310

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1647310>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;