

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1645464](#)

For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## HC-B 6-AMLD-AL


Order No.: 1645464

Illustration shows a version with plastic cover



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1645464>

HEAVYCON panel mounting base B6, with single locking latch, height 27 mm, with aluminum cover

| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 046356 028615 |
| sales group              | D002   |
| Pack                     | 10 pcs.  |
| Customs tariff           | 85369010   |
| Catalog page information | Page 481 (PC-2009)   |

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| General data |  |
|--------------|--|
| Note         | For contact inserts HC-B6, BB10, DD24, M |
| Design       | B6                                       |
| Height       | 27 mm                                    |
| Width        | 43 mm                                    |
| Length       | 80 mm                                    |


HC-B 6-AMLD-AL Order No.: 1645464

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1645464>


|                                 |  |
|---------------------------------|--|
| Housing type                    | Panel mounting base with cover                 |
| Locking type                    | With single locking latch                      |
| Protective cover                | Yes  |
| Degree of protection            | IP65 protection when the connector is inserted |
| Ambient temperature (operation) | -40 °C ... 125 °C                              |
| Housing material                | Aluminum, die-cast                             |
| Housing surface material        | Powder-coated, gray                            |
| Seal material                   | NBR  |
| Material lock                   | High-grade steel, handle: PA-GF                |
| Material grip body interlock    | PA-GF  |
| Material, protective cover      | Al   |
| Length of the assembly cutout   | 52 mm  |
| Width of the assembly cutout    | 35 mm  |

### Diagrams/Drawings

Dimensioned drawing

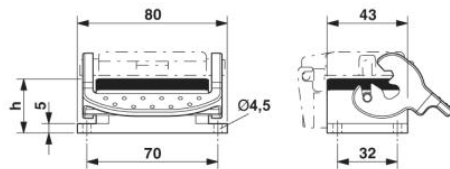

Dimensional drawing

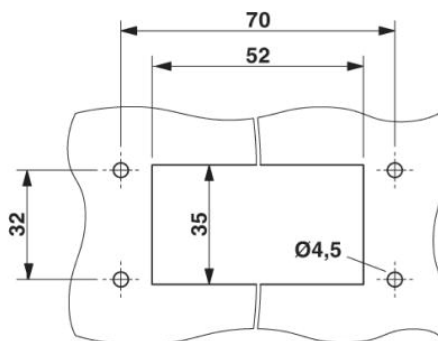

Panel cutout

HC-B 6-AMLD-AL Order No.: 1645464

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1645464>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;