

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[1687626](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog


## HC-B 16-KML-80/O1M32

Order No.: 1687626



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1687626>

HEAVYCON coupling housing B16, with single locking latch, height 80 mm, with support M32

| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 882655 |
| sales group              | D002   |
| Pack                     | 10 pcs.  |
| Customs tariff           | 85389099   |
| Catalog page information | Page 489 (PC-2009)   |

### Product notes

WEEE/RoHS-compliant since:  
03/03/2006



<http://www.download.phoenixcontact.com>  
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| General data |  |
|--------------|--|
| Note         | For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K |
| Design       | B16  |
| Height       | 80 mm  |
| Width        | 43 mm  |
| Length       | 94 mm  |

HC-B 16-KML-80/O1M32 Order No.: 1687626

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1687626>

|                                 |                                 |
|---------------------------------|---------------------------------|
| Housing type                    | Coupling housings               |
| Locking type                    | With single locking latch       |
| Type of the screw connection    | 1x M32                          |
| Degree of protection            | IP65                            |
| Ambient temperature (operation) | -40 °C ... 125 °C               |
| Housing material                | Aluminum, die-cast              |
| Housing surface material        | Powder-coated, gray             |
| Seal material                   | NBR                             |
| Material lock                   | High-grade steel, handle: PA-GF |
| Material grip body interlock    | PA-GF                           |

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

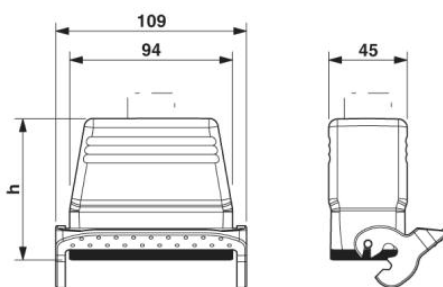

HC-B 16-KML-80/O1M32 Order No.: 1687626

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1687626>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;