

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Power Integrations](#)

[LQA16T300](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

# LQA16T300

## Qspeed™ Family


300 V, 16 A Q-Series Diode



### Product Summary

|                                    |      |    |
|------------------------------------|------|----|
| $I_{F(AVG)}$                       | 16   | A  |
| $V_{RRM}$                          | 300  | V  |
| $Q_{RR}$ (Typ at 125 °C)           | 44   | nC |
| $I_{RRM}$ (Typ at 125 °C)          | 2.65 | A  |
| Softness $t_b/t_a$ (Typ at 125 °C) | 0.7  |    |

### Pin Assignment

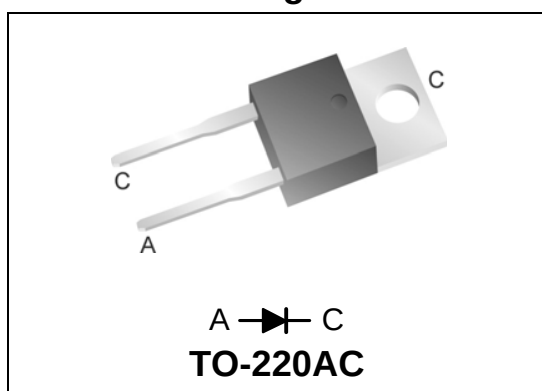

### RoHS Compliant

Package uses Lead-free plating and  
Green mold compound.  
Halogen free per IEC 61249-2-21.

### General Description

This device has the lowest  $Q_{RR}$  of any 300 V Silicon diode. Its recovery characteristics increase efficiency, reduce EMI and eliminate snubbers.

### Applications

- AC/DC and DC/DC output rectification
  - Output and freewheeling diodes
- DC-AC Inverters

### Features

- Low  $Q_{RR}$ , Low  $I_{RRM}$ , Low  $t_{RR}$
- High  $dI_F/dt$  capable (1000A/μs)
- Soft recovery

### Benefits

- Increases efficiency
  - Eliminates need for snubber circuits
  - Reduces EMI filter component size & count
- Enables extremely fast switching

### Absolute Maximum Ratings

Absolute maximum ratings are the values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

| Symbol       | Parameter                         | Conditions                                               | Rating     | Units |
|--------------|-----------------------------------|----------------------------------------------------------|------------|-------|
| $V_{RRM}$    | Peak repetitive reverse voltage   |                                                          | 300        | V     |
| $I_{F(AVG)}$ | Average forward current           | $T_J = 150\text{ °C}$ , $T_C = 104\text{ °C}$            | 16         | A     |
| $I_{FSM}$    | Non-repetitive peak surge current | 60 Hz, ½ cycle                                           | 100        | A     |
| $I_{FSM}$    | Non-repetitive peak surge current | ½ cycle of $t=28\text{ μs}$ Sinusoid, $T_C=25\text{ °C}$ | 350        | A     |
| $T_{J(MAX)}$ | Maximum junction temperature      |                                                          | 150        | °C    |
| $T_{STG}$    | Storage temperature               |                                                          | -55 to 150 | °C    |
|              | Lead soldering temperature        | Leads at 1.6 mm from case, 10 sec                        | 300        | °C    |
| $P_D$        | Power dissipation                 | $T_C = 25\text{ °C}$                                     | 65.8       | W     |

### Thermal Resistance

| Symbol          | Resistance from:    | Conditions | Rating | Units |
|-----------------|---------------------|------------|--------|-------|
| $R_{\theta JA}$ | Junction to ambient | TO-220     | 62     | °C/W  |
| $R_{\theta JC}$ | Junction to case    | TO-220     | 1.9    | °C/W  |

## LQA16T300

### Electrical Specifications at $T_J = 25\text{ }^\circ\text{C}$ (unless otherwise specified)

| Symbol                  | Parameter                           | Conditions                                                 | Min                    | Typ  | Max  | Units |    |
|-------------------------|-------------------------------------|------------------------------------------------------------|------------------------|------|------|-------|----|
| DC Characteristics      |                                     |                                                            |                        |      |      |       |    |
| I <sub>R</sub>          | Reverse current                     | V <sub>R</sub> = 300V, T <sub>J</sub> = 25 °C              | -                      | -    | 25   | μA    |    |
|                         |                                     | V <sub>R</sub> = 300V, T <sub>J</sub> = 125 °C             | -                      | 0.45 | -    | mA    |    |
| V <sub>F</sub>          | Forward voltage                     | I <sub>F</sub> = 16A, T <sub>J</sub> = 25 °C               | -                      | 1.6  | 1.9  | V     |    |
|                         |                                     | I <sub>F</sub> = 16A, T <sub>J</sub> = 150 °C              | -                      | 1.4  | -    | V     |    |
| C <sub>J</sub>          | Junction capacitance                | V <sub>R</sub> = 10V, 1 MHz                                | -                      | 50   | -    | pF    |    |
| Dynamic Characteristics |                                     |                                                            |                        |      |      |       |    |
| t <sub>RR</sub>         | Reverse recovery time               | dI/dt =200A/μs<br>V <sub>R</sub> =200V,I <sub>F</sub> =16A | T <sub>J</sub> =25 °C  | -    | 13   | -     | ns |
|                         |                                     |                                                            | T <sub>J</sub> =125 °C | -    | 25   | -     | ns |
| Q <sub>RR</sub>         | Reverse recovery charge             | dI/dt =200A/μs<br>V <sub>R</sub> =200V,I <sub>F</sub> =16A | T <sub>J</sub> =25 °C  | -    | 11.5 | 15    | nC |
|                         |                                     |                                                            | T <sub>J</sub> =125 °C | -    | 44   | -     | nC |
| I <sub>RRM</sub>        | Maximum reverse recovery current    | dI/dt =200A/μs<br>V <sub>R</sub> =200V,I <sub>F</sub> =16A | T <sub>J</sub> =25 °C  | -    | 1.5  | 1.85  | A  |
|                         |                                     |                                                            | T <sub>J</sub> =125 °C | -    | 2.65 | -     | A  |
| S                       | Softness factor = $\frac{t_b}{t_a}$ | dI/dt =200A/μs<br>V <sub>R</sub> =200V,I <sub>F</sub> =16A | T <sub>J</sub> =25 °C  | -    | 0.7  | -     |    |
|                         |                                     |                                                            | T <sub>J</sub> =125 °C | -    | 0.7  | -     |    |

**Note to component engineers:** Q-Series diodes employ Schottky technologies in their design and construction. Therefore, Component Engineers should plan their test setups to be similar to those for traditional Schottky test setups. (For additional details, see Application Note AN-300.)

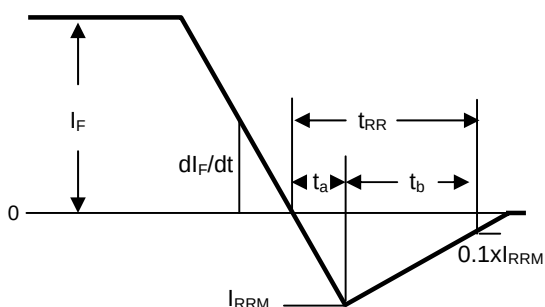


Figure 1. Reverse Recovery Definitions

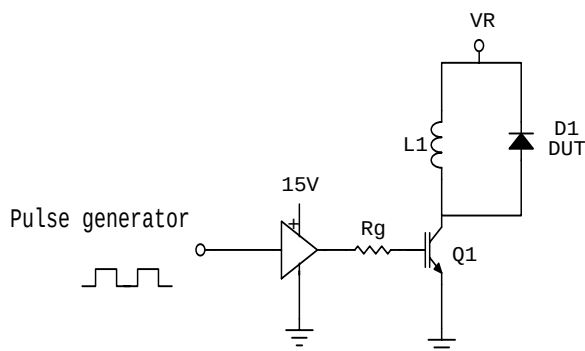


Figure 2. Reverse Recovery Test Circuit

## LQA16T300

### Electrical Specifications at $T_J = 25^\circ\text{C}$ (unless otherwise specified)

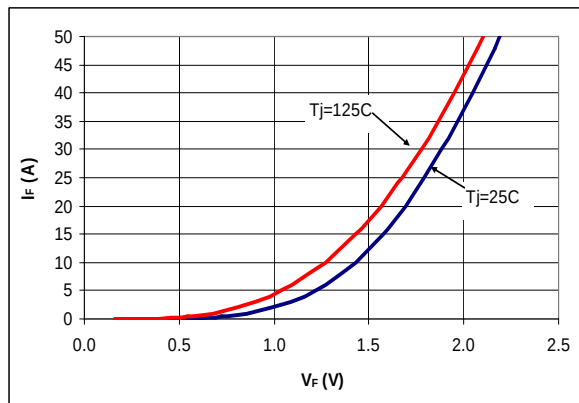


Figure 3. Typical  $I_F$  vs  $V_F$

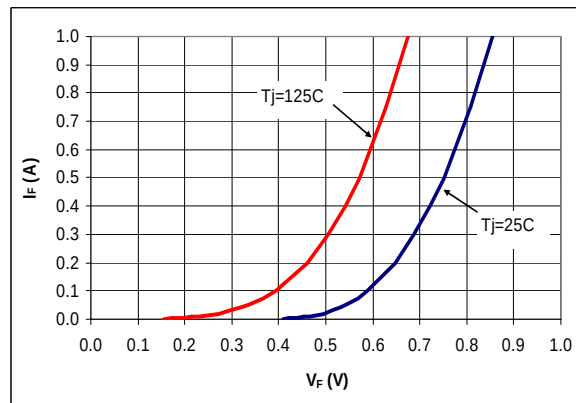


Figure 4. Typical  $I_F$  vs  $V_F$

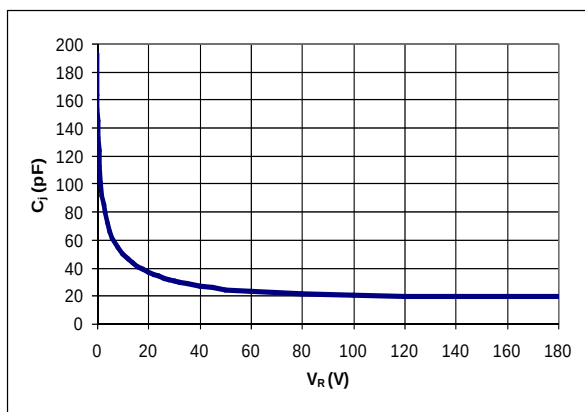


Figure 5. Typical  $C_J$  vs  $V_R$

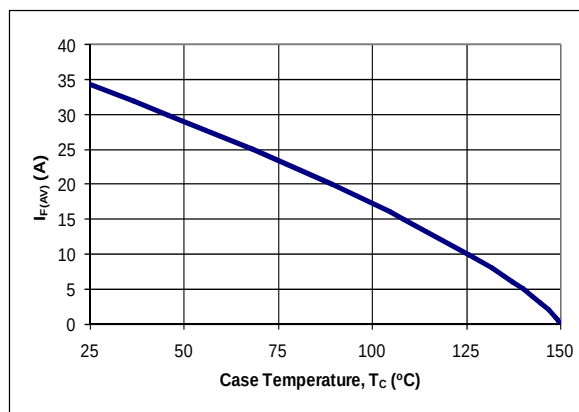


Figure 6. DC Current Derating Curve

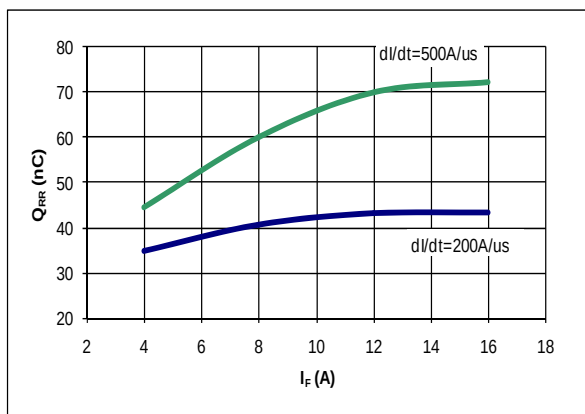


Figure 7. Typical  $Q_{RR}$  vs  $I_F$  at  $T_J = 125^\circ\text{C}$

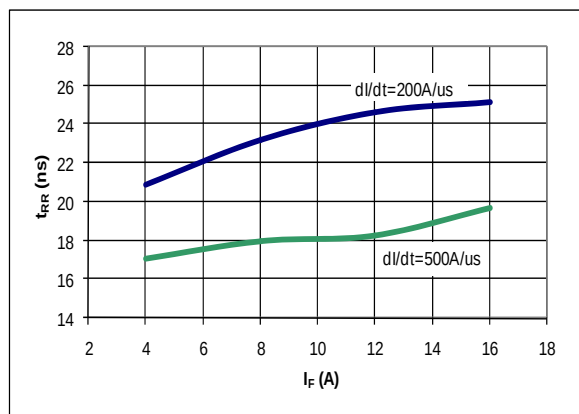


Figure 8. Typical  $t_{RR}$  vs  $I_F$  at  $T_J = 125^\circ\text{C}$

## LQA16T300

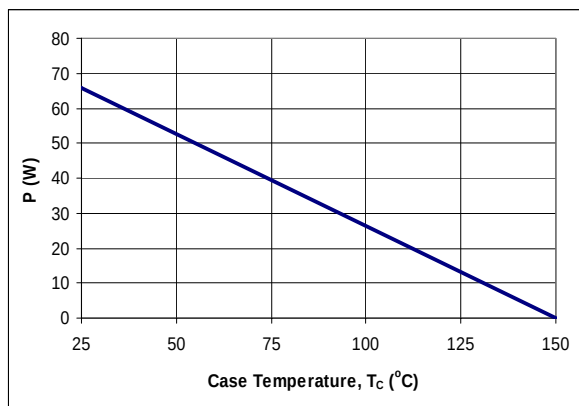


Figure 9. Power Derating Curve

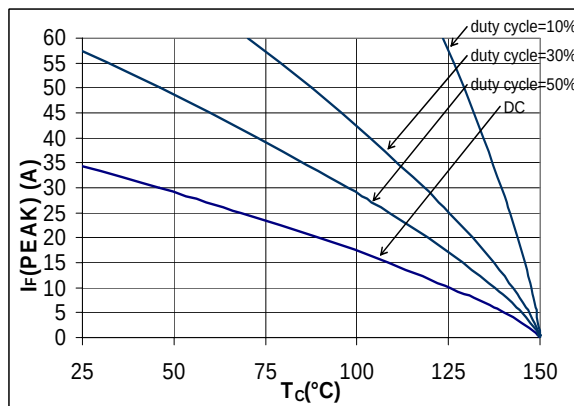


Figure 10.  $I_F(\text{PEAK})$  vs  $T_C$ ,  $f=70$  kHz


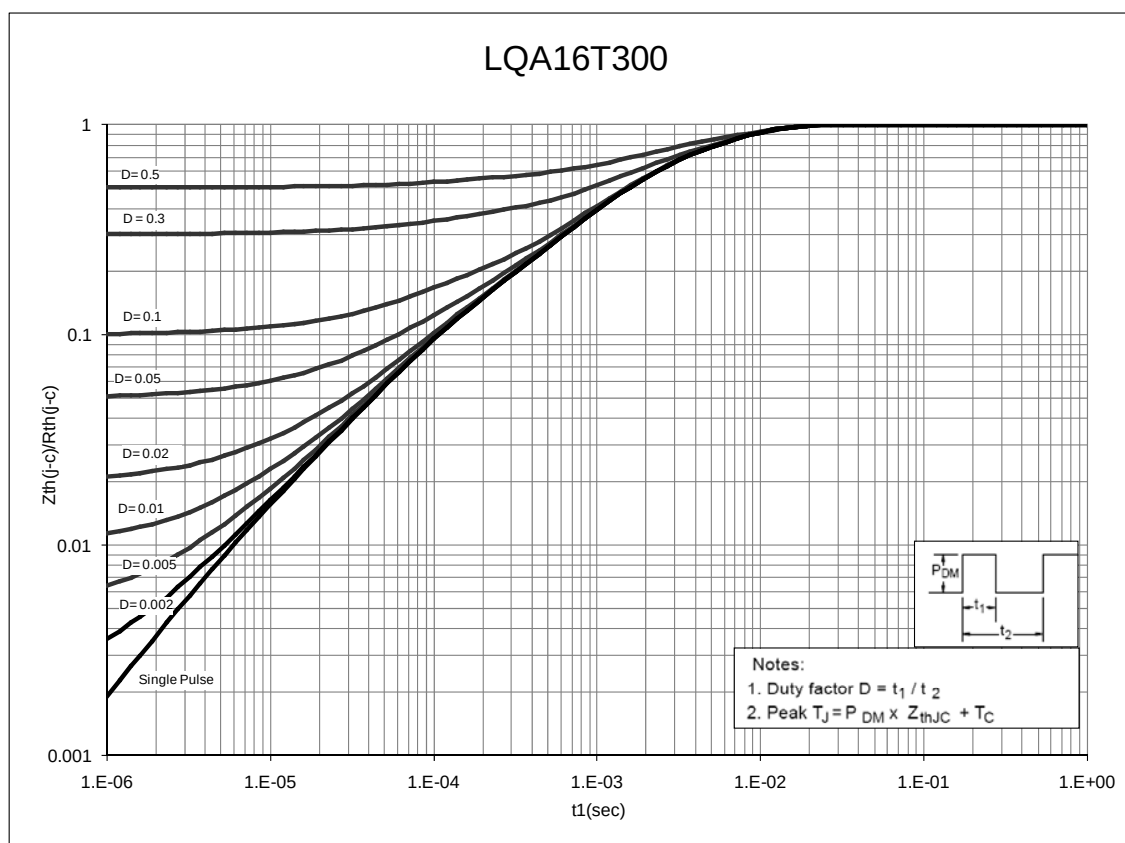


Figure 10. Normalized Maximum Transient Thermal Impedance

## LQA16T300

### Dimensional Outline Drawings

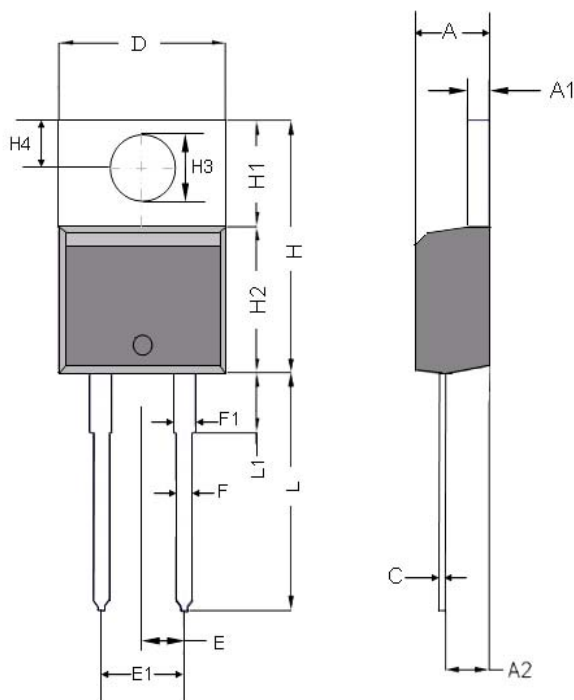

| Dim | Millimeters |       |
|-----|-------------|-------|
|     | MIN         | MAX   |
| A   | 4.32        | 4.70  |
| A1  | 1.14        | 1.40  |
| A2  | 2.03        | 2.79  |
| C   | 0.34        | 0.610 |
| D   | 9.65        | 10.67 |
| E   | 2.49        | 2.59  |
| E1  | 4.98        | 5.18  |
| F   | 0.508       | 1.016 |
| F1  | 1.14        | 1.78  |
| H   | 14.71       | 16.51 |
| H1  | 5.84        | 6.55  |
| H2  | 8.51        | 9.25  |
| H3  | 3.53        | 3.96  |
| H4  | 2.54        | 3.05  |
| L   | 12.70       | 14.22 |
| L1  | -           | 6.35  |

| Mechanical Mounting Method        | Maximum Torque / Pressure specification                                                     |
|-----------------------------------|---------------------------------------------------------------------------------------------|
| Screw through hole in package tab | 1 Newton Meter (nm) or 8.8 inch-pounds (lb-in)                                              |
| Clamp against package body        | 12.3 kilogram-force per square centimeter (kgf/cm <sup>2</sup> ) or 175 lbf/in <sup>2</sup> |

**Soldering time and temperature:** This product has been designed for use with high-temperature, lead-free solder. The component leads can be subjected to a maximum temperature of 300 °C, for up to 10 seconds. See Application Note AN-303, for more details.

### Ordering Information

| Part Number | Package  | Packing       |
|-------------|----------|---------------|
| LQA16T300   | TO-220AC | 50 units/tube |

The information contained in this document is subject to change without notice.

## LQA16T300

| Revision | Notes                                    | Date  |
|----------|------------------------------------------|-------|
| 1.6      | Released by Qspeed                       | 05/09 |
| 1.7      | Converted to Power Integrations Document | 01/11 |

## LQA16T300

**For the latest updates, visit our website: [www.powerint.com](http://www.powerint.com)**

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

### PATENT INFORMATION

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at [www.powerint.com](http://www.powerint.com). Power Integrations grants its customers a license under certain patent rights as set forth at <http://www.powerint.com/ip.htm>.

The PI Logo, TOPSwitch, TinySwitch, LinkSwitch, DPA-Switch, PeakSwitch, CAPZero, SENZero, LinkZero, HiperPFS, HiperTFS, Qspeed, EcoSmart, Clampless, E-Shield, Filterfuse, StackFET, PI Expert and PI FACTS are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©Copyright 2011 Power Integrations, Inc.

## Power Integrations Worldwide Sales Support Locations

### WORLD HEADQUARTERS

5245 Hellyer Avenue  
 San Jose, CA 95138, USA.  
 Main: +1-408-414-9200  
 Customer Service:  
 Phone: +1-408-414-9665  
 Fax: +1-408-414-9765  
 e-mail:  
[usasales@powerint.com](mailto:usasales@powerint.com)

### GERMANY

Rueckertstrasse 3  
 D-80336, Munich  
 Germany  
 Phone: +49-89-5527-3911  
 Fax: +49-89-5527-3920  
 e-mail:  
[eurosales@powerint.com](mailto:eurosales@powerint.com)

### JAPAN

Kosei Dai-3 Building  
 2-12-11, Shin-Yokohama,  
 Kohoku-ku, Yokohama-shi,  
 Kanagawa 222-0033  
 Japan  
 Phone: +81-45-471-1021  
 Fax: +81-45-471-3717  
 e-mail: [japansales@powerint.com](mailto:japansales@powerint.com)

### TAIWAN

5F, No. 318, Nei Hu Rd., Sec. 1  
 Nei Hu District  
 Taipei 114, Taiwan R.O.C.  
 Phone: +886-2-2659-4570  
 Fax: +886-2-2659-4550  
 e-mail:  
[taiwansales@powerint.com](mailto:taiwansales@powerint.com)

### CHINA (SHANGHAI)

Rm 1601/1610, Tower 1  
 Kerry Everbright City  
 No. 218 Tianmu Road West  
 Shanghai, P.R.C. 200070  
 Phone: +86-021-6354-6323  
 Fax: +86-021-6354-6325  
 e-mail:  
[chinasales@powerint.com](mailto:chinasales@powerint.com)

### INDIA

#1, 14<sup>th</sup> Main Road  
 Vasanthanagar  
 Bangalore-560052  
 India  
 Phone: +91-80-4113-8020  
 Fax: +91-80-4113-8023  
 e-mail:  
[indiasales@powerint.com](mailto:indiasales@powerint.com)

### KOREA

RM 602, 6FL  
 Korea City Air Terminal B/D, 159-6  
 Samsung-Dong, Kangnam-Gu,  
 Seoul, 135-728  
 Korea  
 Phone: +82-2-2016-6610  
 Fax: +82-2-2016-6630  
 e-mail: [koreasales@powerint.com](mailto:koreasales@powerint.com)

### EUROPE HQ

1st Floor, St. James's House  
 East Street, Farnham  
 Surrey GU9 7TJ  
 United Kingdom  
 Phone: +44 (0) 1252-730-141  
 Fax: +44 (0) 1252-727-689  
 e-mail:  
[eurosales@powerint.com](mailto:eurosales@powerint.com)

### CHINA (SHENZHEN)

Rm A, B & C 4<sup>th</sup> Floor, Block C,  
 Electronics Science and  
 Technology Building  
 2070 Shennan Zhong Road  
 Shenzhen, Guangdong,  
 P.R.C. 518031  
 Phone: +86-755-8379-3243  
 Fax: +86-755-8379-5828  
 e-mail:  
[chinasales@powerint.com](mailto:chinasales@powerint.com)

### ITALY

Via De Amicis 2  
 20091 Bresso MI  
 Italy  
 Phone: +39-028-928-6000  
 Fax: +39-028-928-6009  
 e-mail:  
[eurosales@powerint.com](mailto:eurosales@powerint.com)

### SINGAPORE

51 Newton Road,  
 #19-01/05 Goldhill Plaza  
 Singapore, 308900  
 Phone: +65-6358-2160  
 Fax: +65-6358-2015  
 e-mail:  
[singaporesales@powerint.com](mailto:singaporesales@powerint.com)

### APPLICATIONS HOTLINE

World Wide +1-408-414-9660

### APPLICATIONS FAX

World Wide +1-408-414-9760