


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Techflex](#)
[F6Q1.25BK25](#)


For any questions, you can email us directly:
sales@integrated-circuit.com

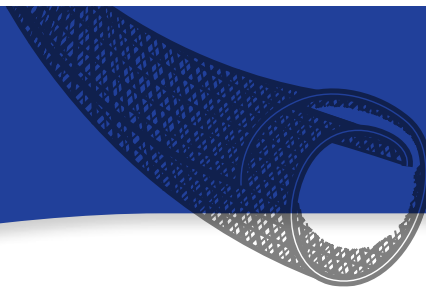

- Retro Look For Audio Cables
- Soft, Classic Cotton Loom Feel
- Cut And Abrasion Resistant
- Cuts Cleanly with Hot Knife
- Halogen Free

Put-Ups

Nominal Size	Part #	Wall Thickness ±0.005"	Bulk Spool	Box A	Box B	Available Colors	Lbs/100'
1/4"	F6Q0.25BK	0.04"	2,000'	200'	100'	Black	1.00
3/8"	F6Q0.38BK	0.04"	1,000'	150'	75'	Black	1.80
1/2"	F6Q0.50BK	0.04"	800'	150'	75'	Black	2.00
3/4"	F6Q0.75BK	0.04"	500'	100'	50'	Black	3.00
1 1/4"	F6Q1.25BK	0.04"	250'	75'	25'	Black	4.00

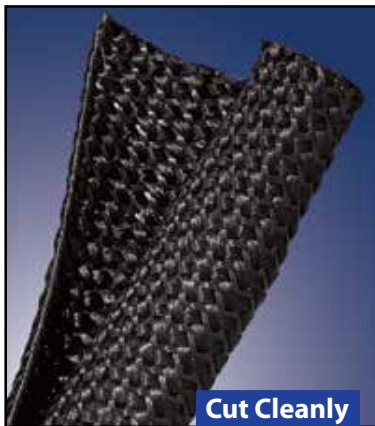

**Cut Cleanly
 Hot Knife**


**Nostalgic Look And Feel!
 Modern Day Performance!**

Flexo F6 Quiet is specially engineered to reduce the noise associated with wire harnesses or cables installed in hard to reach areas such as door panels or dashboards.

The special construction suppresses noise from loose harnesses moving against body or dash panels.

F6 Quiet also has a soft and flexible feel, reminiscent of old style cotton loom, making it the perfect product for restoration projects.


Colors Available:
 Black (BK)

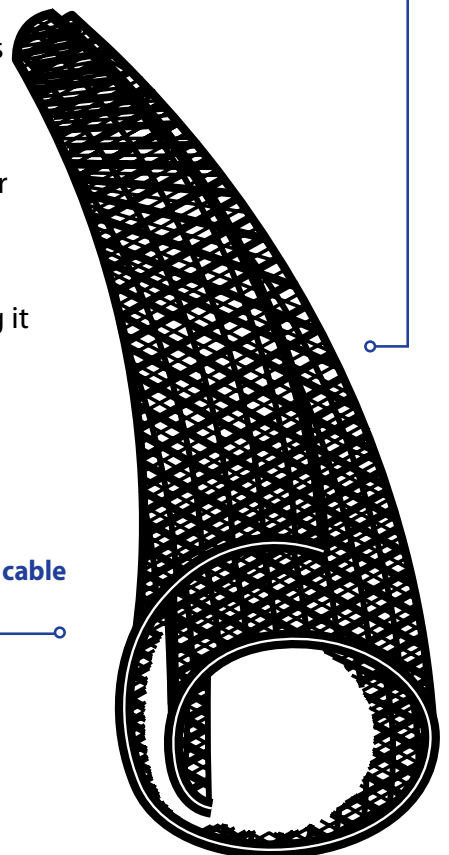

Noise suppression wrap for harnesses and cable in cavities and dashboard installations.

Material	Polyethylene Terephthalate
Grade	F6Q
Wall Thickness	.04"
Drawing Number	TF001F6Q-WD

SPECIALTY
 Technical Data Sheet

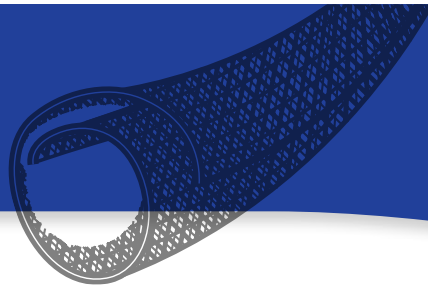

ABRASION **FLAMMABILITY**

Abrasion Resistance
Medium

Rating _____ *UL94
 *UL 94 V-O Raw Material

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
83°F

Humidity
78%

Most Soft Material Worn
Away In Test Area But PET
Braid Is Intact
1,000 Test Cycles

Braid Worn Through
In Both Directions
- Material Destroyed
1,500 Test Cycles

Pre-Test Weight
4,911.80 mg

Post-Test Weight
3,838.50 mg

Test End Loss Of Mass
Point Of Destruction
1,073.30 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
 2=Little Effect 5=Severely Affected
 3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
 ASTM D-2117
446°F (230°C)

Maximum Continuous
 Mil-I-23053
257°F (125°C)

Minimum Continuous
-22°F (-30°C)

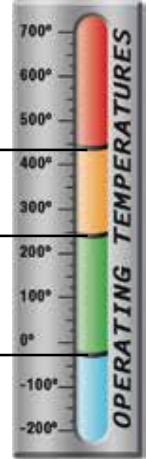

PHYSICAL PROPERTIES

Monofilament Diameter _____	.008-.015
ASTM D-204	
Flammability Rating _____	*UL94
*UL 94 V-O Raw Material	
Recommended Cutting _____	Scissor/HK
Colors _____	1
Wall Thickness _____	.04
Tensile Strength (Yarn) _____	7.5
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCM _____	.00
WVR _____	.16
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	