

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2964319](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog


DEK-TR/INV


Order No.: 2964319



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2964319>

Inverter module. The inverter module inverts the signals of ground switching n-p-n transistor outputs into plus switching p-n-p outputs, and vice versa.



Commercial data	
GTIN (EAN)	 4 017918 176068
sales group	G042
Pack	10 pcs.
Customs tariff	85364190
Catalog page information	Page 143 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
05/16/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Technical data

Supply voltage range	20 V DC ... 30 V DC (U _V)
Continuous current	200 mA
Residual voltage drop	< 1 V

DEK-TR/INV Order No.: 2964319

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2964319>

Leakage current	< 1 mA
Max. transmission frequency	15 kHz

NPN input/PNP output

Switch-on threshold	< 5 V (at $U_V = 24\text{ V}$; < ($U_V - 19\text{ V}$))
Switch-off threshold	> 15 V (at $U_V = 24\text{ V}$; > ($U_V - 9\text{ V}$))
Min. limit values	-2 V
Max. limit values	26 V (at $U_V = 24\text{ V}$; $U_V + 2\text{ V}$)

PNP input/NPN output

Switch-on threshold	> 19 V
Switch-off threshold	< 9 V
Min. limit values	-2 V
Max. limit values	26 V (at $U_V = 24\text{ V}$; $U_V + 2\text{ V}$)

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

General data

Width	6.2 mm
Height	80 mm
Depth	56 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Assembly instructions	In rows with zero spacing
Standards/regulations	IEC 60664
	Basic insulation
Pollution degree	2

DEK-TR/INV Order No.: 2964319

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2964319>

Surge voltage category	II
Color	green
Housing material	Polyamide PA non-reinforced

Certificates / Approvals





Certification

CUL, GOST, UL


Diagrams/Drawings

Application drawing

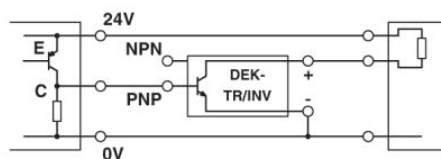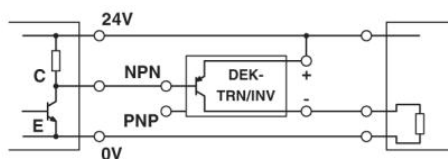

a = NPN output
b = load

Circuit diagram

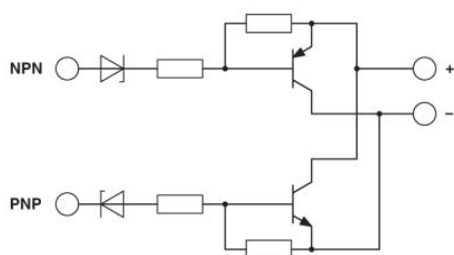

DEK-TR/INV Order No.: 2964319

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2964319>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;