

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2952790](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

EMG 22-DIO 4E-1N5408


Order No.: 2952790

The illustration shows version EMG 22-DIO 4E



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2952790>

Diode module, with 4 diodes, individually wired, diode type 1N 5408



Commercial data	
GTIN (EAN)	
sales group	H100
Pack	10 pcs.
Customs tariff	85411000
Catalog page information	Page 664 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
04/19/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General data	
Diode type	1 N 5408
Max. operating voltage	250 V AC
Peak reverse voltage per diode	1000 V
Reverse current per diode	10 µA

EMG 22-DIO 4E-1N5408 Order No.: 2952790

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2952790>

Conducting state voltage per diode	Approx. 0.8 V
Conducting state current per diode	1.5 A (with single load)
	1 A (with simultaneous loads)
Width	22.5 mm
Height	75 mm
Depth	55 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Surge voltage category	III, basic insulation (as per EN 50178)
Mounting position	Any
Assembly instructions	In rows with zero spacing

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Type of connection	Screw connection

Certificates / Approvals



Certification GOST

Accessories

Item	Designation	Description
------	-------------	-------------

Marking


2947035	EMG-GKS 12	Equipment marker, width 12 mm
---------	------------	-------------------------------

EMG 22-DIO 4E-1N5408 Order No.: 2952790

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2952790>

Diagrams/Drawings

Circuit diagram

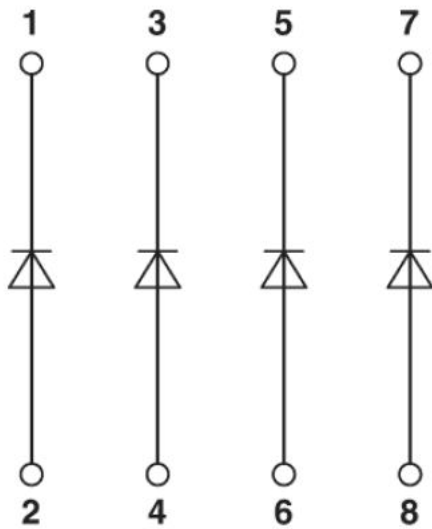

EMG 22-DIO 4E-1N5408 Order No.: 2952790

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2952790>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;