

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2293475](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online catalog

FLKM 14-PA-SLC500/IN/M

Order No.: 2293475

The illustration shows version FLKM 14-PA-SLC500/OUT



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293475>

VARIOFACE front adapter, 2 x 8 channels can be connected, for Allen-Bradley SLC 500, 1746 IV16, and ITV16

Commercial data

GTIN (EAN)	
Note	Made-to-order
sales group	I601
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 192 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
01/25/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Nominal voltage U_N	< 50 V AC
	60 V DC
Connection type, plug connector	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of plug connectors	2

FLKM 14-PA-SLC500/IN/M Order No.: 2293475
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293475>

No. of positions, plug connector	14
Number of positions	14
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Max. permissible current	1 A (per path)
Max. permissible total current	2 A (Per Byte, for supply via connector)
Pollution degree	1
Surge voltage category	II
Supported controller	ALLEN-BRADLEY SLC 500
Supported I/O card	1746 IV16
	1746 ITV16

Certificates / Approvals




Certification

CUL, GOST, UL

Diagrams/Drawings

Circuit diagram

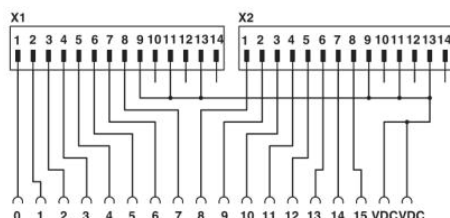

Connection scheme FLKM 14-PA-SLC500/IN/M

FLKM 14-PA-SLC500/IN/M Order No.: 2293475
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2293475>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;