

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[5600437](#)


For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog

## FLKM HDSUB-62/M

Order No.: 5600437

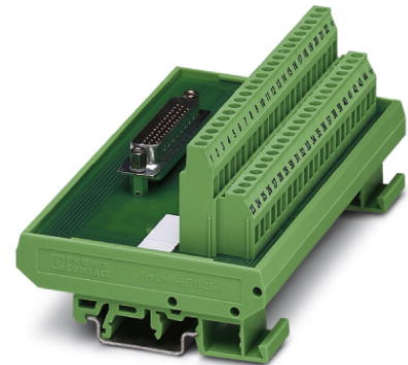


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5600437>

VARIOFACE module, with screw connection and high density D-Subminiature male connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 62, width: 180 mm



### Commercial data

GTIN (EAN)	 4 017918 908881
sales group	I011
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 253 (IF-2007)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	125 V
Max. current carrying capacity per branch	1 A
Number of positions	62
Width	180 mm
Height	77 mm
Depth	58 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

FLKM HDSUB-62/M Order No.: 5600437

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5600437>

Mounting position	Any
<b>Connection data</b>	
Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Number of positions	62
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Type of connection	Pluggable

**Certificates / Approvals**




Certification

CUL, UL

**Diagrams/Drawings**

Circuit diagram

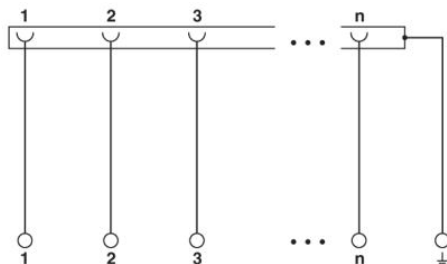


FLKM HDSUB-62/M Order No.: 5600437

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5600437>

---

Schematic diagram

---

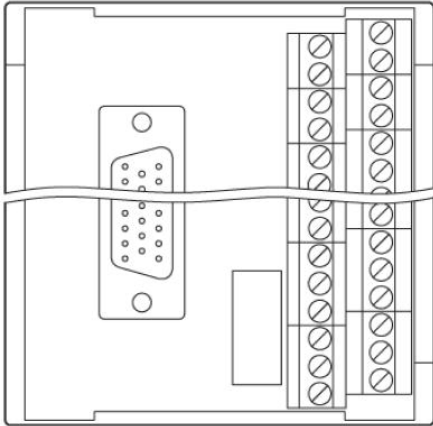

FLKM HDSUB-62/M Order No.: 5600437

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5600437>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;