

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2818960](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

FLT-PLUS CTRL-0.9/I

This item is no longer available. Should you have any questions, please contact our Sales Team.

Order No.: 2818960



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2818960>

Type 1 / Class I / B arrester (lightning current arrester) with arc chopping spark gap and ignition electronics with control lamp, quenching plates for high mains follow-through current quenching capacity, 1-channel. Protection level: 0.9 kV. Housing width: 35 mm (2 Div.)

Commercial data

GTIN (EAN)	
sales group	J013
Pack	1 pcs.
Customs tariff	85363030
Catalog page information	Page 17 (TT-2007)

Product notes

WEEE/RoHS-compliant since:
05/16/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals



FLT-PLUS CTRL-0.9/I Order No.: 2818960

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2818960>

Certification

GOST

Accessories

Item	Designation	Description
------	-------------	-------------

Assembly

1201442	E/UK	End clamp, for assembly on NS 32 or NS 35/7.5 DIN rail
---------	------	--

Bridges

2809209	MPB 18/1- 2	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.
2809212	MPB 18/1- 3	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.
2809225	MPB 18/1- 4	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.
2748564	MPB 18/1- 6	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.
2748577	MPB 18/1- 8	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.
2748580	MPB 18/1- 9	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.
2748593	MPB 18/1-12	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.
2809238	MPB 18/1-57	Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.

Marking


1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
2749589	ZBN 18,LGS:ERDE	Marking labels, printed horizontally, strips with 5 labels, GND (grounding symbol), color: White
2749576	ZBN 18,LGS:L1-N,ERDE	Marker labels, printed horizontally, strips with 5 labels, L1, L2, L3, N, GND, color: white
2809128	ZBN 18:UNBEDRUCKT	Unprinted marker labels, strips with 5 labels for individual labeling with M-PEN or CMS system, for terminal block width: 17.5 mm, color: White

FLT-PLUS CTRL-0.9/I Order No.: 2818960


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2818960>

Diagrams/Drawings

Dimensioned drawing

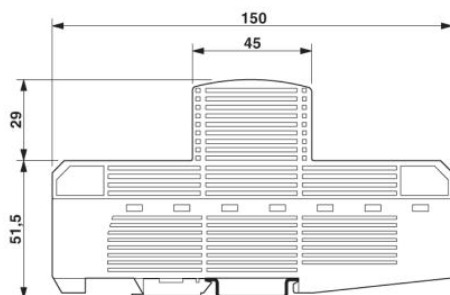

Circuit diagram

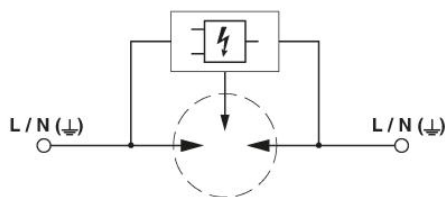

FLT-PLUS CTRL-0.9/I Order No.: 2818960

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2818960>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;