

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2863627](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

IB IL RS 485/422-PRO-PAC

Order No.: 2863627



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2863627>

Inline RS-485/422 function terminal, for serial data transmission, complete with accessories (connector and labeling field), 1 serial input and output channel in RS-485/422 design, pure process data communication

Commercial data

GTIN (EAN)	4 017918 946920
sales group	K413
Pack	1 pcs.
Customs tariff	85389091
Catalog page information	Page 297 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
08/04/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Product description

The serial Inline communication terminal IL RS 485/422-PRO permits simple and fast integration of scanners, scales and printers into existing production processes.

Parameter setting and data exchange is performed exclusively with process data. This means faster communication times for small data volume than with the PCP version

A wide range of applications is supported thanks to various protocols and transmission speeds up to 38400 baud.

IB IL RS 485/422-PRO-PAC Order No.: 2863627

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2863627>
Technical data
Interfaces

Interface	Inline local bus
Type of connection	Inline data jumper
Transmission speed	500 kBit/s
Interface	Either RS-485 half duplex or RS-422 full duplex (as alternative only)
Type of connection	Spring-cage connection
Transmission speed	110 Bit/s ... 38400 Bit/s (configurable)

Power supply

Typical current consumption	170 mA
I/O voltage	24 V DC (via voltage jumper)
Peripherals voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)

Electrical isolation

Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	RS-485/422 interface / 7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	RS-485/422 interface / 24 V supply (I/O) 500 V AC 50 Hz 1 min
	RS-485/422 interface / functional earth ground 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics) / functional earth ground 500 V AC 50 Hz 1 min
	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min

Serial input/output channel

Input buffer	4 kByte
Output buffer	1 kByte
Transmission speed	500 kBit/s
Parity	Even, odd or no parity
Data bits	7 or 8
Stop bits	1 or 2
Transmission type	Transparent mode, end-end mode, dual buffer mode, 3964R, XON/XOFF, MOVILINK protocol

IB IL RS 485/422-PRO-PAC Order No.: 2863627

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2863627>
General data

Weight	135 g
Number of connectors	2
Width	24.4 mm
Height	136.8 mm
Depth	71.5 mm

Inline potential routing

Communications power U_L	7.5 V (via voltage jumper)
Current consumption from U_L	Typ. 170 mA
	max. 260 mA (all connections of the serial interface are short-circuited)

Certificates / Approvals


Certification

ABS, BV, CUL, DNV, GL, LR, UL

Accessories

Item	Designation	Description
------	-------------	-------------

Marking

0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm

Plug/Adapter


2732664	IB IL AO/CNT-PLSET	Connector set
---------	--------------------	---------------

IB IL RS 485/422-PRO-PAC Order No.: 2863627


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2863627>

Diagrams/Drawings


Connection diagram

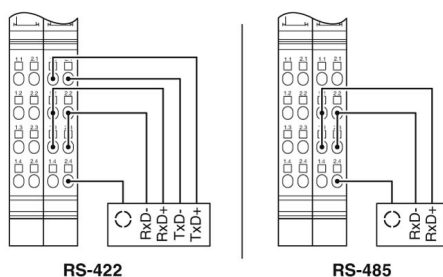

Block diagram

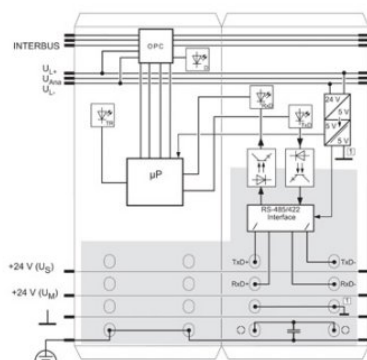

Dimensioned drawing

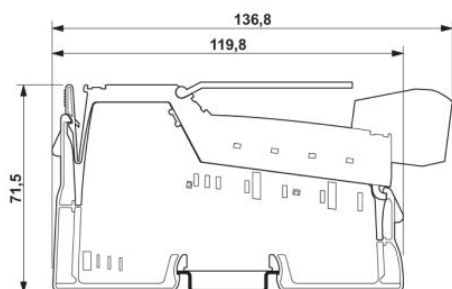

IB IL RS 485/422-PRO-PAC Order No.: 2863627

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2863627>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;