

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[2726308](#)


For any questions, you can email us directly:  
[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



Extract from the online catalog


## IB IL TEMP 2 RTD

Order No.: 2726308

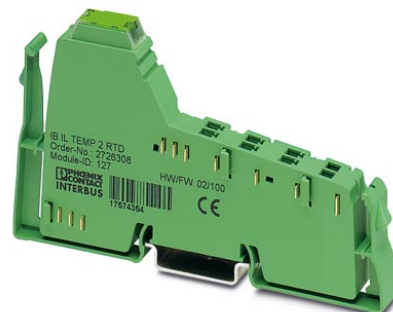

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2726308>

Inline analog input terminal block; without accessories; 2 inputs; RTD (resistance temperature detector); 2, 3, 4-wire connection method

Commercial data	
GTIN (EAN)	 4 017918 168148
sales group	K412
Pack	1 pcs.
Customs tariff	85389091
Catalog page information	Page 77 (AX-2007)

### Product notes

WEEE/RoHS-compliant since:  
01/04/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

Using these analog input terminals, it is possible to measure signals from conventional thermocouples and resistance thermometers.

The terminals are configured for connection to various types of sensors. The user can configure the different sensor characteristic curves himself via process data. It is thus possible to attain the best possible adaptations in very different applications.

The Inline terminals can be labeled using hinged labeling fields. The fields have insert cards that can be labeled individually to suit the application. Additionally, there is the proven ZBFM-6... Zack strip for labeling the terminal points.

IB IL TEMP 2 RTD Order No.: 2726308

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2726308>
**Technical data**
**General data**

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Weight	46 g
Mounting type	DIN rail
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Test section	7.5 V supply (bus logics)/24 V analog supply (analog I/O) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics) / functional earth ground 500 V AC 50 Hz 1 min
	24 V analog supply (analog I/O) / functional earth ground 500 V AC 50 Hz 1 min

**Interface**

Name	Inline local bus
Type of connection	Inline data jumper
Transmission speed	500 kbps
	500 kBit/s
Transmission physics	Copper

**Inline potential routing**

Communications power $U_L$	7.5 V DC (via voltage jumper)
Current consumption from $U_L$	max. 60 mA
	Typ. 43 mA
I/O supply voltage $U_{ANA}$	24 V DC
Current consumption from $U_{ANA}$	max. 18 mA
	Typ. 11 mA

IB IL TEMP 2 RTD Order No.: 2726308

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2726308>

Power consumption	Typ. 587 mW
	max. 882 mW

**Analog inputs**

Number of inputs	2 Typ. $\pm 0.26^{\circ}\text{C}$
Input name	Analog RTD inputs
Type of connection	Spring-cage connection
Connection method	2, 3-conductor
Sensor types (RTD) that can be used	Pt, Ni, Cu, KTY, linear resistors
Linear resistance measuring range	0 $\Omega$ ... 400 $\Omega$
	0 $\Omega$ ... 4 k $\Omega$
Measuring principle	Successive approximation
Measured value representation	16 bits two's complement and other
A/D conversion time	Typ. 120 $\mu\text{s}$ (per channel)
Resolution A/D	16 bit (15 bit + sign bit)
Process data update	30 ms

**Certificates / Approvals**



Certification ABS, BV, CUL, DNV, GL, GOST, LR, UL

Certification Ex: CUL-EX LIS, PxC-EX, UL-EX LIS

**Accessories**


Item	Designation	Description
<b>Marking</b>		
0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm
<b>Plug/Adapter</b>		
2740245	IB IL SCN 6-SHIELD-TWIN	Inline shield connector
2726353	IB IL SCN-6 SHIELD	Inline shield connector

IB IL TEMP 2 RTD Order No.: 2726308


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2726308>

## Diagrams/Drawings

Connection diagram

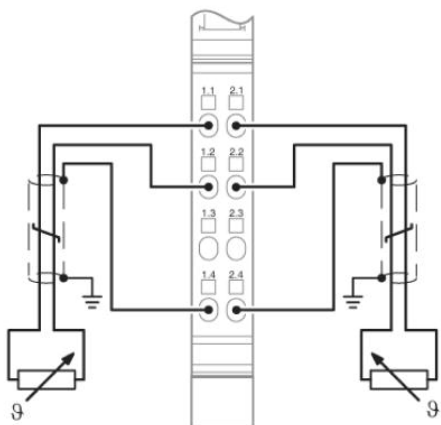

Dimensioned drawing

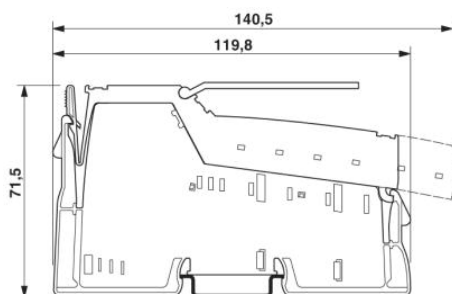

## FAQs

- **Malfunctioning in the potentiometer input range**

If module IB IL TEMP 2 RTD is operated in the areas of linear resistance (400 Ohm or 4 kOhm), or in the potentiometer area (these are the sensor configurations 13, 14 and 15, see page 11 data sheet), and if the 4-wire connection method has been chosen for the first channel, the wire break fault warning message (8002 hex) cannot be guaranteed (e.g. when the Inline connector is unplugged). Instead, messages 8080 hex (measuring underrange) or measured values close to 0 Ohm can occur.

IB IL TEMP 2 RTD Order No.: 2726308

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2726308>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;