

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2878159](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



Extract from the online catalog

IBS IL 24 RB-LK-2MBD

Order No.: 2878159

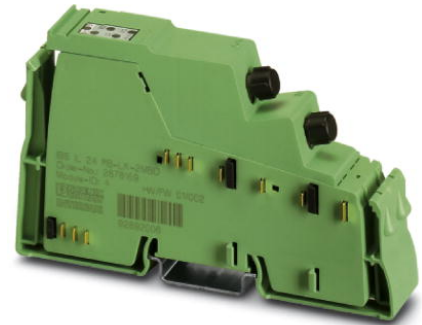

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2878159>

INTERBUS FO branch terminal block, without accessories, transmission speed 2 MBaud, with remote bus branch, 24 V DC



Commercial data	
GTIN (EAN)	
sales group	K410
Pack	1 pcs.
Customs tariff	85389091
Catalog page information	Page 249 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
01/14/2008



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Interface	
Name	INTERBUS remote bus branch
Type of connection	FSMA plugs
Transmission speed	2 MBit/s
Transmission physics	FO

IBS IL 24 RB-LK-2MBD Order No.: 2878159

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2878159>

Name	Inline local bus
Type of connection	Inline data jumper
Transmission speed	2 MBit/s
Transmission physics	Copper

Inline potential routing

Current consumption from U_{ANA}	Typ. 47 mA
	max. 57 mA

General data

Width	24.4 mm
Height	119.8 mm
Depth	71.5 mm
Weight	89 g
Mounting type	DIN rail
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % (On average, 85% occasionally)
Permissible humidity (storage/transport)	75 % (On average, 85% occasionally)
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

IBS IL 24 RB-LK-2MBD Order No.: 2878159

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2878159>

Test section	5 V supply, incoming remote bus, electrically isolated from 5 V supply, outgoing remote bus 500 V AC 50 Hz 1 min
	5 V supply, incoming remote bus, electrically isolated from 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block 500 V AC 50 Hz 1 min
	5 V supply, incoming remote bus, electrically isolated from 24 V main supply, 24 V segment supply 500 V AC 50 Hz 1 min
	5 V supply incoming remote bus / functional earth ground 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus, electrically isolated from 5 V supply, incoming remote bus 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus, electrically isolated from 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus, electrically isolated from 24 V main supply, 24 V segment supply 500 V AC 50 Hz 1 min
	5 V supply outgoing remote bus, electrically isolated from functional earth ground 500 V AC 50 Hz 1 min
	7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block, electrically isolated from 5 V supply incoming remote bus 500 V AC 50 Hz 1 min
	7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block, electrically isolated from 5 V supply outgoing remote bus 500 V AC 50 Hz 1 min
	7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block, electrically isolated from 24 V main supply, 24 V segment supply 500 V AC 50 Hz 1 min
	7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block electrically isolated from functional earth ground 500 V AC 50 Hz 1 min
	24 V main supply, 24 V segment supply, electrically isolated from 5 V supply, incoming remote bus 500 V AC 50 Hz 1 min
	24 V main supply, 24 V segment supply, electrically isolated from 5 V supply, outgoing remote bus 500 V AC 50 Hz 1 min
	24 V main supply, 24 V segment supply, electrically isolated from 7.5 V logics supply, 24 V analog supply, 24 V bus terminal module supply, 5 V logics supply branch terminal block 500 V AC 50 Hz 1 min
	24 V main supply, 24 V segment supply, electrically isolated from functional earth ground 500 V AC 50 Hz 1 min

IBS IL 24 RB-LK-2MBD Order No.: 2878159

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2878159>

Certificates / Approvals




Certification

CUL, UL

Diagrams/Drawings


Connection diagram

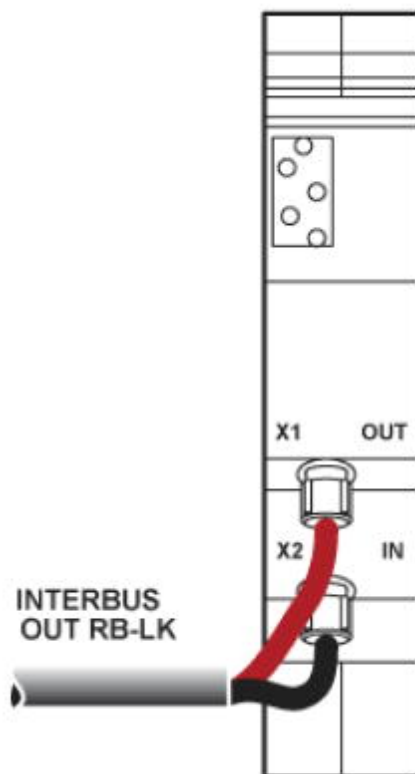

IBS IL 24 RB-LK-2MBD Order No.: 2878159

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2878159>

Dimensioned drawing

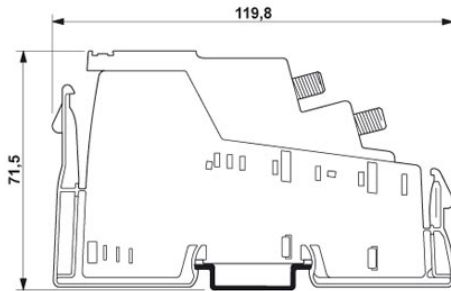

IBS IL 24 RB-LK-2MBD Order No.: 2878159

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2878159>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;