

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[1507803](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

SAC-5P-M12MS PB TR

Order No.: 1507803



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507803>

Terminating resistor PROFIBUS M12

Commercial data

GTIN (EAN)	 4 017918 900403
sales group	D199
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 296 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
12/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Ambient temperature (operation)	-25 °C ... 90 °C (connector)

SAC-5P-M12MS PB TR Order No.: 1507803


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507803>

General characteristics

Coding	B - inverse
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Status display	No


Diagrams/Drawings

Dimensioned drawing

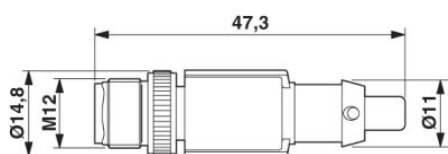

M12 x 1 male connector, straight

Circuit diagram

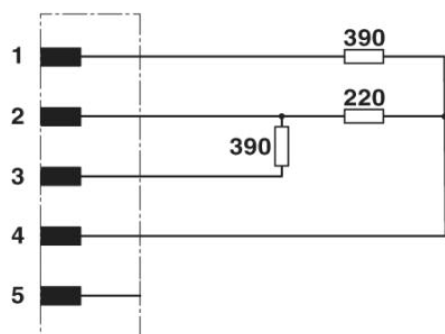

SAC-5P-M12MS PB TR Order No.: 1507803

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507803>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;