

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)
[2300096](#)

For any questions, you can email us directly:

sales@integrated-circuit.com



Extract from the online
catalog

SIM-EI-OV- 24DC/ 24DC/3

Order No.: 2300096



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2300096>

Power optocoupler, with protection circuits in 24 V DC input and output
circuits. Direct current voltage output max. 3 A

Commercial data

GTIN (EAN)	
sales group	G150
Pack	10 pcs.
Customs tariff	85364190
Catalog page information	Page 299 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
12/19/2006



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage U_N	24 V DC $\pm 20\%$
Input voltage range in reference to U_N	0.8 ... 1.2
Switching threshold "0" signal in reference to U_N	≤ 0.4
Switching threshold "1" signal in reference to U_N	≥ 0.8

SIM-EI-OV- 24DC/ 24DC/3 Order No.: 2300096

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2300096>

Typical input current at U_N	7 mA
Type of protection	Protection against polarity reversal
	Surge protection
Transmission frequency	300 Hz

Output data

Output nominal voltage	24 V DC
Output nominal voltage range	3 V DC ... 33 V DC
Limiting continuous current	3 A (see derating curve)
Maximum inrush current	15 A (10 ms)
Voltage drop at max. limiting continuous current	≤ 200 mV
Output circuit	2-wire, floating
Type of protection	Protection against polarity reversal
	Surge protection
Protective circuit/component	Polarity protection diode

General data

Width	13 mm
Height	29 mm
Depth	25 mm
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Assembly instructions	Can be aligned with 2 mm spacing
Standards/regulations	DIN VDE 0110

Certificates / Approvals


Certification


GOST

SIM-EI-OV- 24DC/ 24DC/3 Order No.: 2300096

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2300096>


Diagrams/Drawings

Diagram

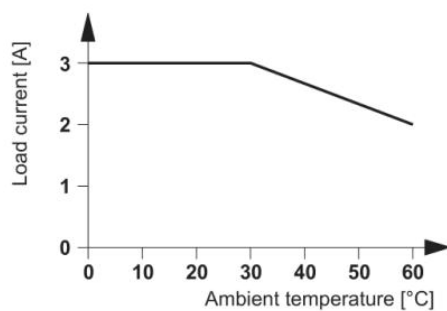

Derating curve for SIM-EI-OV-24 DC/24 DC/3

Circuit diagram

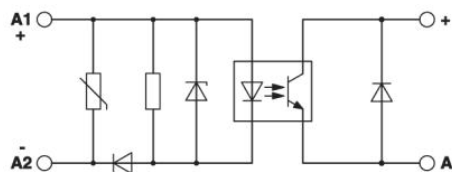

SIM-EI-OV- 24DC/ 24DC/3 Order No.: 2300096

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2300096>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;