

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#)  
[3042955](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



**Extract from the online catalog**

## SP 4/ 7

Order No.: 3042955

The illustration shows the 6-position version



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3042955>

Connectors, Type of connection: Spring-cage connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 6 mm<sup>2</sup>, AWG 28 - 10, Width: 43.4 mm, Height: 41.5 mm, Color: gray

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| GTIN (EAN)               |                    |
| Note                     | Made-to-order      |
| sales group              | A671               |
| Pack                     | 25 pcs.            |
| Customs tariff           | 85366990           |
| Catalog page information | Page 279 (CL-2009) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 43.4 mm |
| Length | 21 mm   |
| Height | 41.5 mm |

SP 4/ 7 Order No.: 3042955

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3042955>
**Technical data**

|                                  |                                                       |
|----------------------------------|-------------------------------------------------------|
| Maximum load current             | 32 A (with 6 mm <sup>2</sup> conductor cross section) |
| Rated surge voltage              | 8 kV                                                  |
| Pollution degree                 | 3                                                     |
| Surge voltage category           | III                                                   |
| Insulating material group        | I                                                     |
| Connection in acc. with standard | IEC 61984                                             |
| Nominal current I <sub>N</sub>   | 32 A                                                  |
| Nominal voltage U <sub>N</sub>   | 800 V                                                 |
| Open side panel                  | nein                                                  |
| Number of positions              | 7                                                     |

**Connection data**

|                                                                                         |                        |
|-----------------------------------------------------------------------------------------|------------------------|
| Conductor cross section solid min.                                                      | 0.08 mm <sup>2</sup>   |
| Conductor cross section solid max.                                                      | 6 mm <sup>2</sup>      |
| Conductor cross section stranded min.                                                   | 0.08 mm <sup>2</sup>   |
| Conductor cross section stranded max.                                                   | 4 mm <sup>2</sup>      |
| Conductor cross section AWG/kcmil min.                                                  | 28                     |
| Conductor cross section AWG/kcmil max                                                   | 10                     |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 0.14 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 4 mm <sup>2</sup>      |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 0.14 mm <sup>2</sup>   |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 4 mm <sup>2</sup>      |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1 mm <sup>2</sup>      |
| Type of connection                                                                      | Spring-cage connection |
| Stripping length                                                                        | 10 mm                  |
| Internal cylindrical gage                                                               | A4                     |

**Certificates / Approvals**


SP 4/ 7 Order No.: 3042955

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3042955>

Certification

CB, CSA, CUL, UL, VDE-PZI

## Accessories

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

### Assembly


|         |          |                                                     |
|---------|----------|-----------------------------------------------------|
| 3040559 | PR       | Latching, Number of positions: 1, Color: orange     |
| 3040630 | PR/2     | Latching, Number of positions: 2, Color: orange     |
| 3040614 | PRZ      | Latching, Number of positions: 2, Color: orange     |
| 3040591 | PSH 3- 6 | Test plugs, Color: black                            |
| 3040601 | PSH 5-10 | Test plugs, Color: black                            |
| 3040627 | PZ/2     | Strain relief, Number of positions: 2, Color: black |
| 3040643 | PZ/4     | Strain relief, Number of positions: 4, Color: black |

### Plug/Adapter


|         |           |                                 |
|---------|-----------|---------------------------------|
| 3002885 | ISH 4/0,5 | Insulating sleeve, Color: gray  |
| 3002898 | ISH 4/1,0 | Insulating sleeve, Color: black |

## Diagrams/Drawings

Diagram

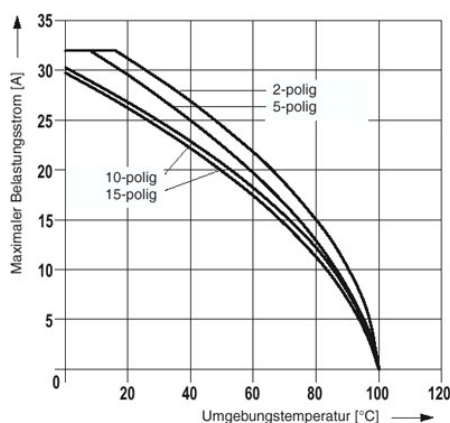


Derating curve for spring-cage terminals ST 4/1P.. and ST 4/2P.. with all plug versions SP 4/... . The derating curves are determined by multiplying the values of the base curves by the factor 0.8.

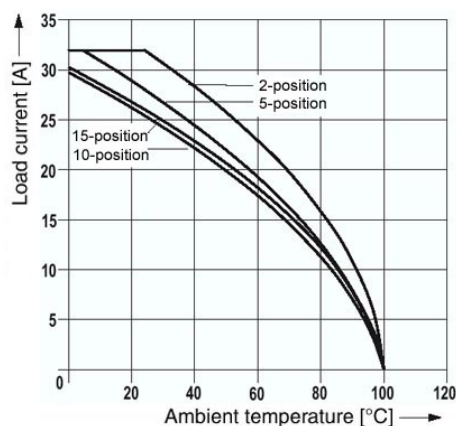

Derating curve for the spring-cage terminal with all plug versions SP 4/... .

SP 4/ 7 Order No.: 3042955

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3042955>

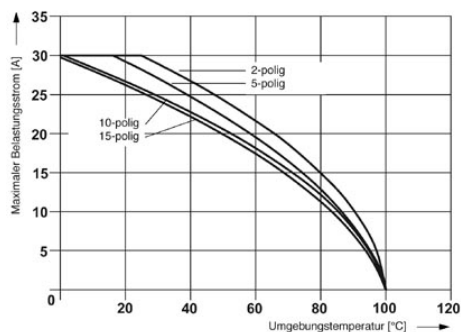

Derating curve for ST 4/ 1P and for all plug versions SP... .

Circuit diagram



SP 4/ 7 Order No.: 3042955

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3042955>

---

#### Address

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;